

235P

Single-Phase Pump Monitor



Description

The Littelfuse 235P is designed to protect 5-15hp, 230V, single-phase pumps from dry-well, dead-head, jammed impeller and overvoltage and undervoltage conditions.

A calibration adjustment allows the 235P to be calibrated to your specific pumping applications, thereby reducing the possibility of false or nuisance tripping. A unique microcontroller-based voltage and current-sensing circuit constantly monitors the incoming power for fluctuations causing overcurrent and undercurrent. When an abnormality, such as loss of suction is detected, the 235P deactivates its output relay and directly disconnects the pump motor. The unit then begins its user-selectable restart delay (dry-well recovery) timer. When the timer counts to zero or power is removed and reapplied, the unit reactivates its output relay and turns the pump back on.

The 235P communicates with a hand-held diagnostics tool called the Informer (sold separately). The Informer displays parameters including calibration points, trip points, run time and last faults.

An external current transformer is required for operation (sold separately).


Special considerations for pump cables larger than #10 AWG: In some cases where larger motors are installed with deep set pumps, pump cables are used that exceed the relay's terminal size. In these conditions, a short splice of #10 AWG or #12 AWG may be a solution at the control box. **Note:** All local, state and national electric codes should be followed when applying this solution.

NOTE: The 235P model has a sensitivity adjustment for the dry-well trip point. After calibration is done, you can adjust the sensitivity for the dry-well/dead-head trip point from 70-90% of the full load. This makes the unit even more adaptable to varying pumping applications. If you have a very low producing well, you increase the sensitivity closer to the 90% mark, or if you have a very heavy producing well, you would decrease the sensitivity around the 70% mark.

Wiring Diagram

7

MOTOR & PUMP PROTECTION

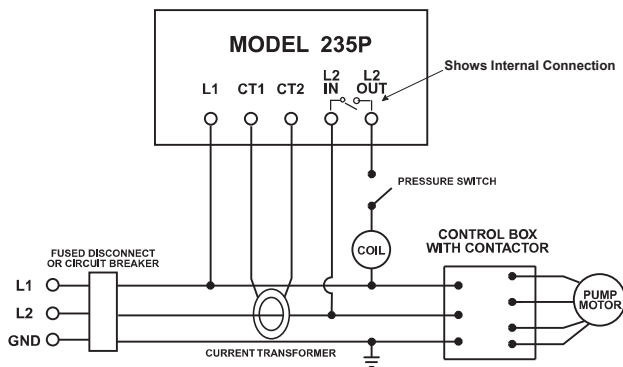

For dimensional drawing see: Appendix page 511, Figure 15.

Ordering Information

MODEL	LINE VOLTAGE	DESCRIPTION
235P	230VAC	5 - 15hp
235P-ENCL	230VAC	233P with NEMA3R enclosure

PART*	SIZE	CURRENT (A)	CT CURRENT RATIO
CT-0050-D10	5 - 7.5hp	27.5 - 42.1	50:5
CT-0075-D10	10hp	51	75:5
CT-0100-D10	15hp	75	100:5

* Current transformer sold separately

Features & Benefits

FEATURES	BENEFITS
Proprietary microcontroller based circuitry	Constant monitoring of voltage and current protects pumps from dry-well, dead-head, jammed impeller, rapid cycling, and voltage faults
Onboard sensitivity adjustment	Allows user to adjust the current sensitivity for the dry-well / dead-head trip point from 70% - 90% of the full load.
Adjustable restart delay	Allows user to select well recovery time delay after a dry-well condition occurs, or to select manual reset
Built in IR communications link	Used with the Informer, allows user to see stored faults, run time, and also troubleshoot the pump while it's running
LED indication	Provides status and diagnostics for troubleshooting

235P

Accessories



Informer

A hand-held diagnostic tool that uses an infrared receiver to access information which can be helpful for troubleshooting the system. Includes the Informer IR Kit-12

Specifications

Functional Specifications

Adjustments/Settings

Overcurrent	125% of calibration point
Underload (dry-well)	Adjustable (70 to 90% of calibrated run power)
Overvoltage	265VAC
Undervoltage	190VAC
Number of restarts allowed in a 60-sec. period (rapid-cycling)	4
Trip Delay Times	
Overcurrent	5 seconds
Dry-well	4 seconds
Restart Delay Times	
Over/undervoltage	2 seconds
All other faults	Manual, 2-225 Minutes

Input Characteristics

Supply Voltage	230VAC
Load Range	5 - 15 hp
Frequency	50*/60Hz

Output Characteristics

Output Contact Rating-SPST	A300, 720A @240VAC (10 amps max.)
-----------------------------------	-----------------------------------

General Characteristics

Operating Temperature	-40° to 60° C (-40° to 140° F)
Maximum Input Power	5 W
Wire Gauge	Solid or Stranded 10 - 22AWG
Terminal Torque	13 in.-lbs.

Safety Marks

cUL Listed	UL508, C22.2 No. 14
-------------------	---------------------

Dimensions

H	73.66 mm (2.9")
W	133.35 mm (5.25")

D	73.99 mm (2.913")
----------	-------------------

Weight	14 oz.
---------------	--------

Mounting Methods	#8 screws
-------------------------	-----------

*Note: 50Hz will increase all delay timers by 20%

Dimensions

H	73.66 mm (2.9")
W	133.35 mm (5.25")

D	73.99 mm (2.913")
----------	-------------------

Weight	14 oz.
---------------	--------

Mounting Methods	#8 screws
-------------------------	-----------