

BRASS GATE VALVE WITH DRAIN

BII 
SERIES 0813



- 200 PSI W.O.G. (Cold water, oil, gas)
- Black cast hand wheel
- Non-rising stem - solid wedge disc
- Threaded & CxC
- Meets NSF approval

PART NO.	THREADED	SIZE	PORT DIA. INS.	QUANTITY		LIST PRICE-F
				CTN	CASE	
0813-05		1/2"	0.508	10	120	9.34
0813-07		3/4"	0.760	10	90	12.71
0813-10		1"	0.960	5	60	18.83

FULL PORT MINI BALL VALVES

BII 



- 600 W.O.G. (Cold water, oil, gas)
- Forged brass construction - body
- Chrome plated ball
- Teflon packing & ball seat

PART NO.	SIZE	PORT DIA. INS.	QUANTITY		LIST PRICE-F
			CTN	CASE	
0828-01	1/8" FPT x FPT	0.30	20	200	4.44
0828-02	1/4" FPT x FPT	0.30	20	200	4.79
0828-01M01F	1/8" MPT x 1/8" FPT	0.30	20	200	4.79
0828-01M02F	1/8" MPT x 1/4" FPT	0.30	20	200	4.44
0828-02M02F	1/4" MPT x 1/4" FPT	0.30	20	200	4.44

STANDARD PORT CAST BRASS BALL VALVES

BII 
SERIES 0829



- 400 W.O.G.
- Teflon packing and seat
- Cast brass body
- Chrome plated ball
- Blow-out proof stem
- Blue handle


PART NO.	LIST THREADED PRICE-F	PART NO. CXC	LIST PRICE-F	SIZE	PORT DIA.INS.	QUANTITY	
						CTN	CASE
0829-02	5.85			1/4"	0.3144	6	240
0829-03	POR			3/8"	0.3144	6	120
0829-05	6.55	0829C-05	5.75	1/2"	0.3930	6	120
0829-07	9.22	0829C-07	8.64	3/4"	0.5895	6	120
0829-10	16.13	0829C-10	POR	1"	0.7467	6	60
0829-12	POR	0829C-12	21.79	1-1/4"	0.9432	2	30
0829-15	33.33	0829C-15	POR	1-1/2"	1.2576	2	30
0829-20	47.72	0829C-20	46.12	2"	1.4934	2	24
0829-25	121.62			2-1/2"	1.9650	1	12
0829-30	143.57			3"	2.5152	1	8
0829-40	226.68			4"	2.9475	1	6

NOTE: Handles are available. Please contact your Sales Rep.

"BII FAST" FORGED BRASS STANDARD PORT BALL VALVES





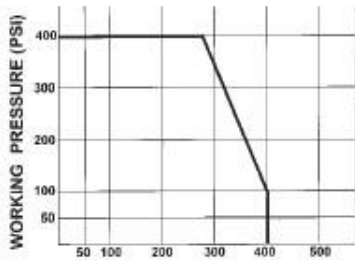

- 400 PSI W.O.G. (Cold water, oil, gas)
- Blow-out proof stem-forged brass
- 150 PSI Saturated Steam
- Yellow plastic sleeve
- Meets NSF approval
- Meets UL approval for 1/4" to 4" threaded only



WORKING TEMPERATURE (°F)

PART NO.	THREADED SIZE	PORT DIA. INS.	QUANTITY CTN	CASE	LIST PRICE-F
0821-01	1/8"	0.3937	10	180	8.85
0821-02	1/4"	0.3937	10	180	7.48
0821-03	3/8"	0.3937	10	180	7.48
0821-05	1/2"	0.3937	10	120	7.48
0821-07	3/4"	0.5905	10	90	10.88
0821-10	1"	0.7874	6	60	16.66
0821-12	1-1/4"	0.9842	4	36	25.37
0821-15	1-1/2"	1.2598	4	24	35.66
0821-20	2"	1.4960	2	16	49.70
0821-25	2-1/2"	1.9685	2	8	138.81
0821-30	3"	2.4803	2	6	216.42
0821-40	4"	2.9527	1	4	394.92

Series "0821" Connection Options Port Diameter, Carton/Case Quantities As Above Unless Shown Otherwise

COMPRESSION x COMPRESSION c/w DRAIN	COMPRESSION - NO DRAIN NOTE: Valves have brass boss which is not drilled for drain.	PEX x PEX	PEX x PEX c/w DRAIN																																
<table border="0" style="width: 100%;"> <tr><td>PART NO.</td><td>LIST PRICE-F</td></tr> <tr><td>0821CPR-05</td><td>14.49</td></tr> <tr><td>0821CPR-07</td><td>19.74</td></tr> <tr><td>0821CPR-10</td><td>28.34</td></tr> </table> 	PART NO.	LIST PRICE-F	0821CPR-05	14.49	0821CPR-07	19.74	0821CPR-10	28.34	<table border="0" style="width: 100%;"> <tr><td>PART NO.</td><td>LIST PRICE-F</td></tr> <tr><td>0821CPR-05ND</td><td>14.30</td></tr> <tr><td>0821CPR-07ND</td><td>19.57</td></tr> <tr><td>0821CPR-10ND</td><td>28.74</td></tr> </table> 	PART NO.	LIST PRICE-F	0821CPR-05ND	14.30	0821CPR-07ND	19.57	0821CPR-10ND	28.74	<table border="0" style="width: 100%;"> <tr><td>PART NO.</td><td>LIST PRICE-F</td></tr> <tr><td>0821P-03</td><td>10.03</td></tr> <tr><td>0821P-05</td><td>6.00</td></tr> <tr><td>0821P-07</td><td>7.69</td></tr> <tr><td>0821P-10</td><td>26.25</td></tr> </table> 	PART NO.	LIST PRICE-F	0821P-03	10.03	0821P-05	6.00	0821P-07	7.69	0821P-10	26.25	<table border="0" style="width: 100%;"> <tr><td>PART NO.</td><td>LIST PRICE-F</td></tr> <tr><td>0821WDP-05</td><td>9.39</td></tr> <tr><td>0821WDP-07</td><td>12.32</td></tr> </table> 	PART NO.	LIST PRICE-F	0821WDP-05	9.39	0821WDP-07	12.32
PART NO.	LIST PRICE-F																																		
0821CPR-05	14.49																																		
0821CPR-07	19.74																																		
0821CPR-10	28.34																																		
PART NO.	LIST PRICE-F																																		
0821CPR-05ND	14.30																																		
0821CPR-07ND	19.57																																		
0821CPR-10ND	28.74																																		
PART NO.	LIST PRICE-F																																		
0821P-03	10.03																																		
0821P-05	6.00																																		
0821P-07	7.69																																		
0821P-10	26.25																																		
PART NO.	LIST PRICE-F																																		
0821WDP-05	9.39																																		
0821WDP-07	12.32																																		

COMPRESSION FULL PORT BALL VALVE

BEST BUY



SERIES 082CP



- 600 PSI W.O.G. (Cold water, oil, gas)
- Full Port
- Blow out proof stem - forged brass
- Blue plastic sleeve

PART NO.	SIZE	QUANTITY		LIST PRICE-F
		CTN	CASE	
With Drain				
082CP-05	1/2"	10	100	10.95
082CP-07	3/4"	10	60	17.94
082CP-10	1"	4	40	26.89
No Drain				
082CP-05ND	1/2"	10	100	10.03
082CP-07ND	3/4"	10	60	16.55
082CP-10ND	1"	4	40	26.32

NOTE: Handles are available. Please contact your Sales Rep.

"BII" FORGED BRASS FULL PORT BALL VALVES - SERIES 0825



SERIES 0825



- 1/4" thru 2" rated 600 W.O.G.,
2 1/2" thru 4" rated 400 W.O.G.
- 150 PSI saturated steam
- Forged brass
- Teflon packing
- Chrome plated ball
- Yellow plastic sleeve
- Blow-out proof stem

- The following gas approvals apply to 1/2" - 2" threaded valves only:
- Meets CSA approval

5G STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5 PSIG RATED GAS VALVE

PART NO. THREADED	LIST PRICE-F	PART NO. CXC	LIST PRICE-F	SIZE	PORT DIA.INS.	QUANTITY CTN CASE
0825-02	4.44			1/4"	0.393	15 120
0825-03	4.48			3/8"	0.393	15 120
0825-05	7.56	0825C-05	6.23	1/2"	0.590	15 120
0825-07	10.83	0825C-07	10.56	3/4"	0.787	10 60
0825-10	14.85	0825C-10	13.64	1"	0.984	8 48
0825-12	25.07	0825C-12	24.13	1-1/4"	1.259	4 24
0825-15	33.54	0825C-15	35.71	1-1/2"	1.575	2 24
0825-20	52.16	0825C-20	51.82	2"	1.969	2 12
0825-25	118.56	0825C-25	107.76	2-1/2"	2.559	2 6
0825-30	146.15	0825C-30	147.80	3"	2.952	2 4
0825-40	279.09	0825C-40	251.87	4"	3.937	1 2

"BII" FORGED BRASS FULL PORT BALL VALVES - SERIES 0827



SERIES 0827



- 1/4" thru 2" rated 600 W.O.G.,
2 1/2" thru 4" rated 400 W.O.G.
- Chrome Plated Ball
- Yellow plastic sleeve

- 150 PSI Saturated Steam
- Teflon Packing
- Blow-out proof stem

PART NO.	LIST THREADED PRICE-F	LIST CXC	LIST PRICE-F	PORT SIZE	DIA. INS.	QUANTITY CTN CASE
0827-02	5.65			1/4"	0.39	20 100
0827-03	5.14			3/8"	0.39	20 100
0827-05	7.24	0827C-05	6.38	1/2"	0.59	50 100
0827-07	11.13	0827C-07	10.19	3/4"	0.75	30 60
0827-10	18.09	0827C-10	16.27	1"	0.98	20 40
0827-12	26.49	0827C-12	24.52	1-1/4"	1.25	12 24
0827-15	41.03	0827C-15	38.97	1-1/2"	1.57	9 18
0827-20	58.12	0827C-20	53.55	2"	1.97	6 12
0827-25	137.55	0827C-25	115.80	2-1/2"	2.52	3 6
0827-30	168.39	0827C-30	152.27	3"	2.95	2 4

- The following gas approvals apply to 1/4" - 2" threaded valves only:
- Meets CSA approval
- Meets UL approval

CAN 3.16

CAN / CGA - 3.16 STANDARD
125 PSIG RATING (CAN)
FOR OUTDOOR USE

BRS125G

125 PSIG RATING (USA)
ASME B16.33 STANDARD

1/2PSI

ANSI Z21.15 (USA)
CGA 9.1 (CAN)
1/2 PSIG APPLIANCE VALVE


5G

STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5 PSIG RATED GAS VALVE

"BII FAST" FORGED BRASS FULL PORT BALL VALVES



*NOTE: The 4" valve 0822-40 is reduced port design (2.952").

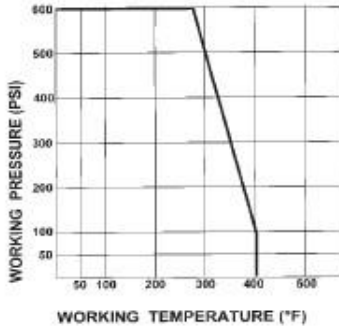

- 600 PSI W.O.G. (Cold water, oil, gas)
- 150 PSI Saturated Steam
- Meets UL approval for 1/4" to 2" threaded only
- Meets NSF approval
- Meets FM approval for 1/4" to 2" threaded only

- Blow-out proof stem
- Yellow plastic sleeve

ANSI
AMERICAN NATIONAL
STANDARDS INSTITUTE

PART NO.	SIZE	PORT DIA. IN.	QUANTITY CTN	QUANTITY CASE	LIST PRICE-F
0822-02	1/4"	0.393	10	180	7.89
0822-03	3/8"	0.393	10	180	7.89
0822-05	1/2"	0.499	10	120	8.07
0822-07	3/4"	0.787	10	90	13.51
0822-10	1"	0.984	6	60	20.63
0822-12	1-1/4"	1.259	4	36	33.77
0822-15	1-1/2"	1.496	4	24	44.55
0822-20	2"	1.968	2	12	71.36
0822-25	2-1/2"	2.480	1	8	209.40
0822-30	3"	2.952	2	6	317.58
0822-40*	4"	2.952			471.00

COMPLETE WITH #304 STAINLESS STEEL HANDLE & NUT

PART NO.	SIZE	PORT DIA. IN.	QUANTITY CTN	QUANTITY CASE	LIST PRICE-F
0822SH-05	1/2"	0.499	10	120	13.45
0822SH-07	3/4"	0.787	10	90	22.22
0822SH-10	1"	0.984	6	60	29.64
0822SH-12	1-1/4"	1.259	4	36	47.82
0822SH-15	1-1/2"	1.496	4	24	59.02
0822SH-20	2"	1.968	2	12	99.68

- The following gas approvals apply to 1/2" - 2" threaded valves only:
- Meets CSA approval

BRS125G 125 PSIG RATING (USA)
ASME B16.33 STANDARD

1/2PSI

ANSI Z21.15 (USA)
CGA 9.1 (CAN)
1/2 PSIG APPLIANCE VALVE

CAN 3.16 CAN / CGA - 3.16 STANDARD
125 PSIG RATING (CAN)
FOR OUTDOOR USE

5G

STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5 PSIG RATED GAS VALVE

FULL PORT FORGED LOCKING HANDLE BALL VALVES



- The locking device covers the top nut of the valve making removal impossible without a key
- These valves can be locked in both the open and closed positions
- 600 PSI up to 2", over 2" 450 PSI non-shock cold working pressure, 150 WSP all sizes
- Pure Teflon® self-lubricating seats with flexible-lip design
- Chrome plated brass ball for longer life
- Full port to DIN 3357 for maximum flow
- Blowout-proof nickel plated brass stem
- Two Viton O-rings at the stem for maximum safety
- 40°F to 350°F
- Meets UL approval
- Meets FM approval for 1/4" - 2" only
- CRN approved
- CSA approved

The following apply to 1/4" thru 2" sizes:

1/2PSI ANSI Z21.15 (USA)
CGA 9.1 (CAN)
1/2 PSIG APPLIANCE VALVE

5G STANDARD 3.88 (USA)
STANDARD CR91-002 (CAN)
5 PSIG RATED GAS VALVE

CAN 3.16 CAN / CGA - 3.16 STANDARD
125 PSIG RATING (CAN)
FOR OUTDOOR USE

BRS125G 125 PSIG RATING (USA)
ASME B16.33 STANDARD

PART NO.	SIZE	PORT DIA. IN.	QUANTITY CTN	QUANTITY CASE	CASE WGT - lbs	LIST PRICE-F
0826LH-02	1/4"	0.314	12	192	64	22.29
0826LH-03	3/8"	0.393	12	192	64	22.29
0826LH-05	1/2"	0.590	8	128	68	24.86
0826LH-07	3/4"	0.787	12	96	80	34.17
0826LH-10	1"	0.984	8	64	88	51.82
0826LH-12	1-1/4"	1.259	8	32	65	80.71
0826LH-15	1-1/2"	1.574	6	24	63	96.04
0826LH-20	2"	1.968	4	16	66	153.22
0826LH-25	2-1/2"	2.559	2	20	20	441.63
0826LH-30	3"	3.149	1	13.6	13.6	581.72
0826LH-40	4"	3.937	1	22.3	22.3	998.84

NOTE: Handles are available. Please contact your Sales Rep.

"BII" FORGED BRASS FULL PORT BALL VALVE WITH BARBED CONNECTIONS



SERIES 082B



PART NO.	SIZE	QUANTITY		LIST PRICE-F
		CTN	CASE	
082B-05	1/2"	10	100	8.87
082B-07	3/4"	6	60	15.07
082B-10	1"	6	48	22.89
082B-12	1-1/4"	6	24	36.60

"BII" FORGED BRASS FULL PORT BALL VALVE



SERIES 082FB



PART NO.	SIZE	QUANTITY		LIST PRICE-F
		CTN	CASE	
082FB-05	1/2" FPT x 1/2" Barb	10	100	8.76
082FB-07	3/4" FPT x 3/4" Barb	10	60	14.13
082FB-10	1" FPT x 1" Barb	6	36	21.80
082FB-12	1-1/4" FPT x 1-1/4" Barb	4	24	35.67

"BII FAST" FORGED BRASS FULL PORT BALL VALVE W/DRAIN



- 600 PSI W.O.G. (Cold water, oil, gas)
- Blow out proof stem - forged brass
- Meets NSF approval

PART NO.	THREADED	CxC	SIZE	PORT DIA. INS.	QUANTITY		LIST PRICE-F
					CTN	CASE	
0823-05	0823C-05		1/2"	0.499	10	120	9.72
0823-07	0823C-07		3/4"	0.787	10	60	16.28
0823-10	0823C-10		1"	0.984	6	36	24.86

FORGED BRASS FULL PORT BALL VALVE W/DRAIN

BEST BUY



SERIES 082WD



- 600 PSI W.O.G. (Cold water, oil, gas)
- Blue plastic handle
- Blow out proof stem - forged brass body


PART NO.	THREADED	LIST PRICE-F	PART NO.	LIST PRICE-F	SIZE	PORT DIA. INS.	QUANTITY	
							CTN	CASE
082WD-05		8.91	082WDC-05	7.93	1/2"	0.590	15	120
082WD-07		13.57	082WDC-07	13.15	3/4"	0.748	10	60
082WD-10		18.79	082WDC-10	17.78	1"	1.023	8	48

#316 CF8M STAINLESS STEEL BALL VALVES

- Investment casting
- PTFE Seal and Packing
- Blow-out proof stem
- Threads conform to ASME B1.20.1
- Mounting Pad Tapping

- Two-piece full port
- Locking handle
- 1000 W.O.G.

PART NO.	SIZE IPS	LIST PRICE-F
SSBV1000-03	3/8"	16.68
SSBV1000-05	1/2"	17.58
SSBV1000-07	3/4"	24.61
SSBV1000-10	1"	37.19
SSBV1000-12	1-1/4"	56.35
SSBV1000-15	1-1/2"	82.64
SSBV1000-20	2"	114.58
SSBV1000-25	2-1/2"	219.16



- Two-piece standard port
- 2000 W.O.G. sizes 1/4" to 3/4" 1500 W.O.G. sizes 1" to 2"
- Locking handle

PART NO.	SIZE IPS	LIST PRICE-F
SSBV2000-03	3/8"	22.62
SSBV2000-05	1/2"	35.16
SSBV2000-07	3/4"	50.38
SSBV2000-10	1"	65.10
SSBV2000-12	1-1/4"	100.71
SSBV2000-15	1-1/2"	128.96
SSBV2000-20	2"	215.70

