

HEAVY-DUTY CAST IRON EFFLUENT PUMP

APPLICATIONS

Ideal for liquid effluent pumping applications, as well as light commercial applications with up to 11/16" diameter semi-solids.

FEATURES & BENEFITS

- 1/3 hp 115 Volt thermal overload protected continuous duty motor
- Rugged cast iron construction
- · Heavy-duty cast iron pump base and impeller
- Automatic piggyback float switch




Model	Item No.	UPC	HP	Amps	Volts	Discharge	Cord	d Gallons Per Hour at Height					Chut Off	Min. Basin
Model	itelli No.						Length	5′	10'	15'	20′	25′	Shut-Off	Diameter
RL31EA	620040	0 10121 12134 8	1/3	10.5	115	2" NPT	20′	6300	5400	4200	2700	900	28′	18" or more

CARTON SPECIFICATIONS

Model	Length	Width	Height	Weight (lbs)	Carton Cubes (cu ft)		Quantity per Layer	Layers per Pallet
RL31EA	9.75"	12.5"	21.5"	52	1.52	24	12	2



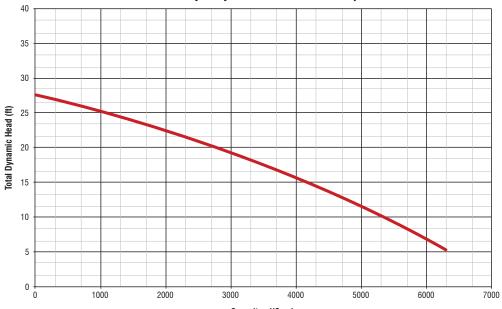

Capacity - US gph