

Float Arrangement Diagram



Oreco Systems®
Incorporated

814 AIRWAY AVENUE

SUTHERLIN, OREGON


97479-9012

TELEPHONE:

(541) 459-4449

FACSIMILE:

(541) 459-2884

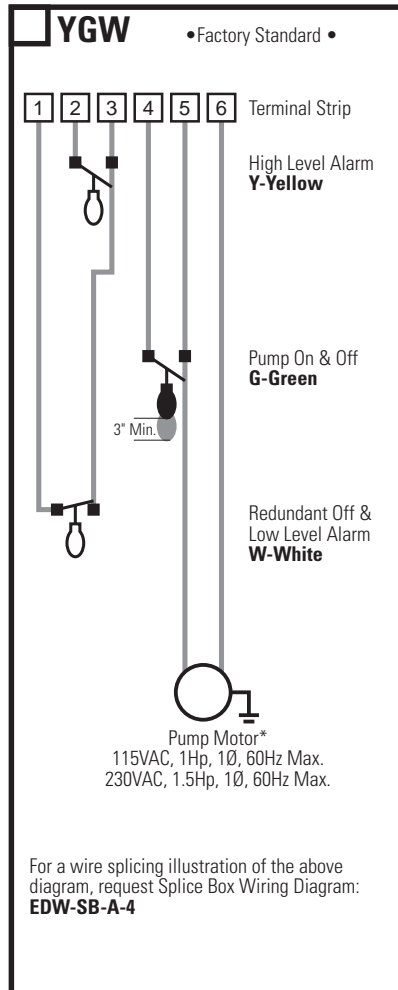

Float Types



Typical Oreco float model: A
Specs: contact - normally open
differential - no minimum
power rating - signal
Possible substitutions: B,C,D



Typical Oreco float model: B
Specs: contact - normally open
differential - 3" min.
power rating - pump
Possible substitutions: C,D



Typical Oreco float model: T
Specs: contact - normally closed
differential - no minimum
power rating - signal

***NOTE:** The mechanical float maximum motor-rating may be lower than the control panel maximum motor-rating. Use the chart below to choose a mechanical float that will meet your pump motor needs.

Model	Volts	Hp
B	120VAC	1/2
	240VAC	1
C	120VAC	1/2
	240VAC	1.5
D	120VAC	3/4
	240VAC	1.5

Control Panel Series

A RO

Drawing No.

EDW-FA-A-2

EDW-FA-A-2
Rev 3.0 © 02/15/08