



Ductile Iron Check Valve

Sizes 2" / 50 mm

Model 80DI **FLOMATIC**[®]

Flomatic Corporation

Materials

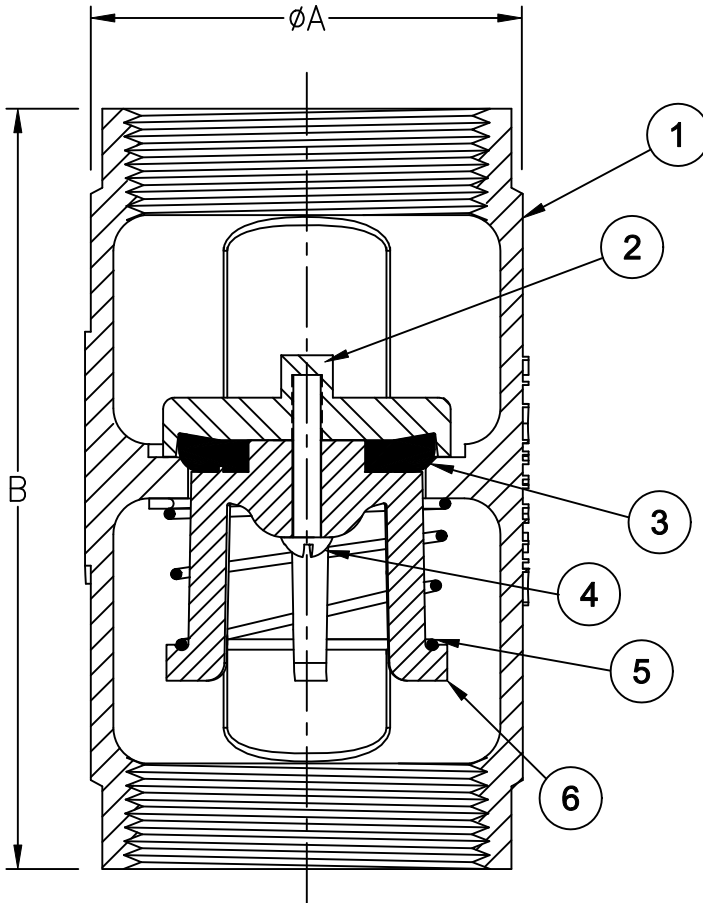

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Dome	Stainless Steel	304
3	2	Disc	Buna-n	-----
4	1	Bolt	Stainless Steel	316
5	1	Spring	Stainless Steel	303
6	1	Guide (Epoxy Coated)*	Ductile Iron	65-45-12

*Optional Stainless Steel (add "S" to end of part number)
or Delrin (add "P" to end of part number) available

Dimensions

Max Temp 180°F (82°C)
Max Pressure 400psi (24bar)

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
2	50	7937	3	76	5-9/32	134	3.3	1.5

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

FLOMATIC[®] VALVES

January 25, 2005
Dwg No: S7937 Rev: E (7/12)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798