Splice Box Wiring Diagram
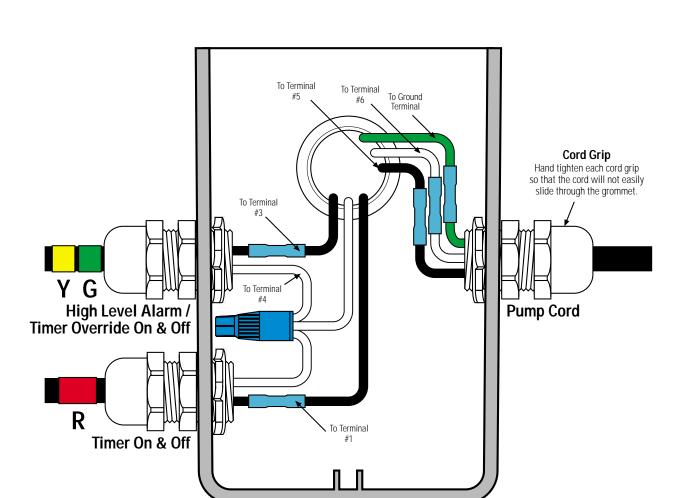
To Terminal #5

To Terminal #6

To Ground Terminal

To Terminal #3

To Terminal #4

To Terminal #1

Y G

**High Level Alarm /
Timer Override On & Off**

R

Timer On & Off

Cord Grip
Hand tighten each cord grip so that the cord will not easily slide through the grommet.

Pump Cord

Key

▬	Black Wire
▭	White Wire
▬	Green Wire
🔵	Waterproof Wire Nut
🔵	Heat Shrink & Butt Connector *

* Refer to drawing EIN-SB-SB-1 for splicing instructions.

Float Tag Colors

Y - Yellow
P - Purple
B - Blue
G - Green
R - Red
O - Orange
E - Grey
W - White

Note: Multi-function floats will have more than one marker

Attention: Failure to follow splicing instructions will void warranty

Control Panel Series	Float Function Color Code	Splice Box Model	Drawing No.
S PT	**(YG)R**	**SB3**	**EDW-SB-S-6**