

Foot Valve

Model 60SE




Sizes 2-1/2" Thru 4" / 65 mm Thru 100 mm

Flomatic Corporation

Material

Enviro Check®

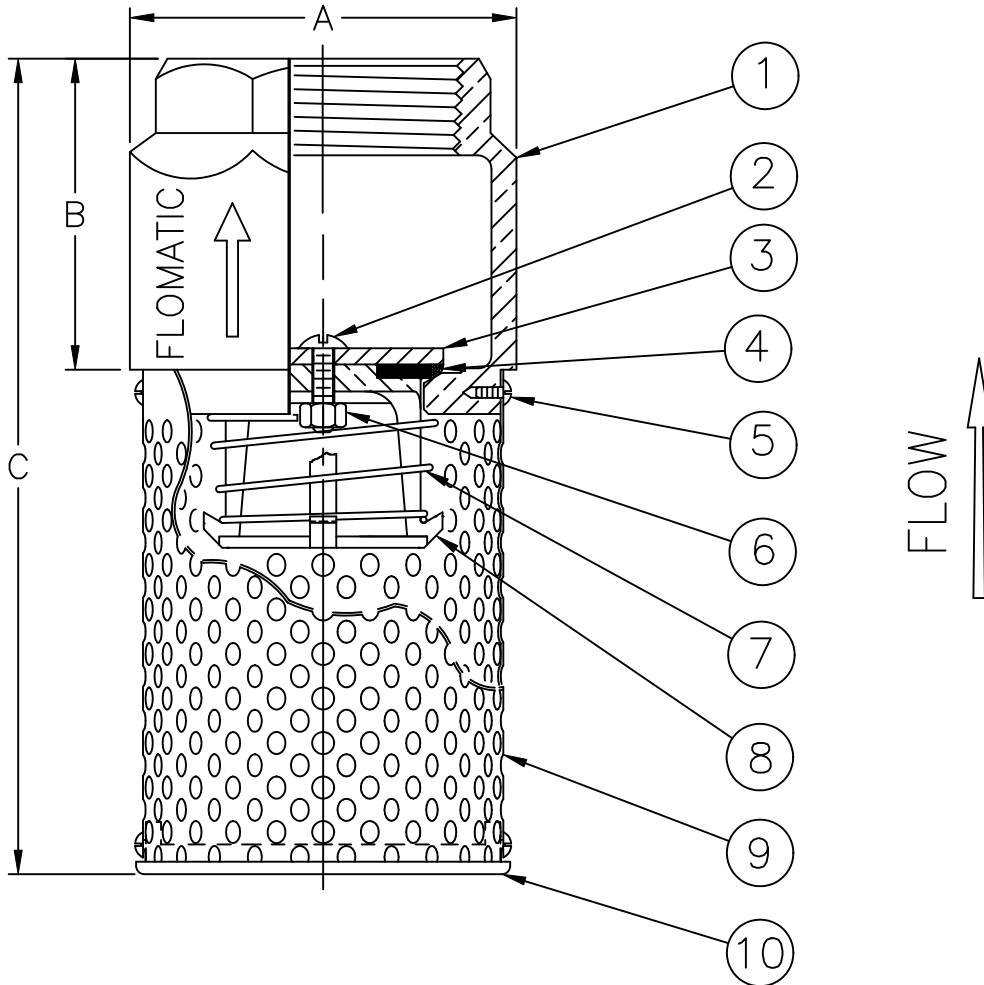

Open Area: 35-50%
 Max Temp 180°F (82°C)
 Max Pressure 250psi (18bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	6	1	Jam Nut	Stainless Steel	18-8
2	1	Screw	Stainless Steel	18-8	7	1	Spring	Stainless Steel	302
3	1	Flat Washer	Stainless Steel	18-8	8*	1	Guide	Unleaded Bronze	C89833
4	1	Seal	Disc	—	9	1	Screen	Stainless Steel	18-8
5	6	Screw	Stainless Steel	18-8	10	1	Cap	Unleaded Bronze	C89833

* Guide for the 4" is 316 Stainless Steel

Dimensions

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2	65	4106E	3-5/8	92	2-59/64	74	8-1/16	205	6	2.8
3	80	4107E	4-9/16	116	3-13/32	97	9-9/16	243	11	5
4	100	4108E	6-1/8	156	4-1/4	108	12-13/32	315	19	8.6

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited.



February 28, 2005
 Dwg No: S4106E-8 Rev: C (3/12)

FLOMATIC CORPORATION
 GLENS FALLS, N.Y. 12801
 PHONE (518) 761-9797
 FAX (518) 761-9798