

Models: PF4N4524, PF4NC4534, PF4NC4544, PF4NC4564, PF4NC7524, PF4NC7534, PF4NC7544, PF4NC7564, PF4NC11334, PF4NC11344, PF4NC11364, PF4NC15034, PF4NC15044

Features:

Submersible non-clog sewage pump designed for typical raw sewage applications.

- **DISCHARGE:** 4" 125 lb., ANSI Flange, Horizontal
- **LIQUID TEMPERATURE:** 104°F
- **MOTOR HOUSING, VOLUTE & SEAL PLATE:** Cast Iron, Class 30
- **IMPELLER:** 2 vane open type with pump out vanes on back side, Dynamically balanced, ISO G6.3, Cast Iron, Class 30
- **SHAFT & HARDWARE:** Stainless steel
- **PAINT:** Air dry enamel
- **SQUARE RINGS:** Buna-N
- **SEAL:** Double mechanical, 1.25 inch, Oil Filled pressure equalized reservoir, Carbon/Ceramic/Buna-N inner seal, Silicon Carbide/Buna-N outer seal
- **UPPER BEARING:** Single row, ball, oil lubricated
- **LOWER BEARING:** Double row, ball, oil lubricated
- **POWER CORD:** 25 Ft., SOW type cord. Epoxy sealed housing with secondary Pressure grommet for sealing and strain relief.
- **SENSOR CORD:** 25 Ft., 18/5, 0.476" O.D., SOW type cord.
- **MOTOR:** Class F Insulation, Oil Filled
- **SINGLE PHASE:** Capacitor Start/Capacitor Run. Requires Starter or Panel which includes capacitors and overload protection. (Included in listed panels)
- **THREE PHASE:** 230/460 Volt. Dual Voltage. Requires overload protection to be included in control panel. (Included in listed panels)
- **SEAL LEAK SENSOR:** Normally open (N/O), 2 probe design. requires relay in control panel. (Included in listed panels)
- **TEMPERATURE SENSOR:** Normally closed (N/C), requires relay in control panel. (Included in listed panels)
- **WARRANTY:** 1 year




**Submersible Non-Clog
4" Discharge,
3" Spherical Solids,
Double Seal**

MODEL	HP	Volt/ PH	NEMA Start Code	Full Load Amps	Locked Rotor Amps	Cord Size	Cord Type	Cord O.D inch	SIMPLEX PANEL P/N	DUPLEX PANEL P/N
PF4NC4524	4.5	230/1	A	26.0	59.0	10/4	SOW	0.78	PF1053NC-COST-40	PF2053NC-COST-40
PF4NC4534	4.5	230/3	E	17.6	56.0	10/4	SOW	0.78	PF1054-OST-20	PF2054-OST-20
PF4NC4544	4.5	460/3	E	8.8	28.0	10/4	SOW	0.78	PF1055-OST	PF2055-OST
PF4NC4564	4.5	208/3	C	20.9	48.6	10/4	SOW	0.78	PF1052-OST-25	PF2052-OST-25
PF4NC7524	7.5	230/1	A	39.0	96.0	10/4	SOW	0.78	PF1083-COST-40	PF2083-COST-40
PF4NC7534	7.5	230/3	D	23.6	80.0	10/4	SOW	0.78	PF1084-OST-25	PF2084-OST-25
PF4NC7544	7.5	460/3	D	11.8	40.0	10/4	SOW	0.78	PF1085-OST-20	PF2085-OST-20
PF4NC7564	7.5	208/3	B	30.8	69.5	10/4	SOW	0.78	PF1082-OST-32	PF2082-OST-32
PF4NC11334	11.3	230/3	D	28.4	126.0	10/4	SOW	0.78	PF1124-OST-32	PF2124-OST-32
PF4NC11344	11.3	460/3	D	14.2	63.0	10/4	SOW	0.78	PF1125-OST-20	PF2125-OST-20
PF4NC11364	11.3	208/3	B	32.2	109.5	10/4	SOW	0.78	PF1122-OST-65	PF2122-OST-65
PF4NC15034	15	230/3	D	40.0	160.0	10/4	SOW	0.78	PF1154-OST-65	PF2154-OST-65
PF4NC15044	15	460/3	D	20.0	80.0	10/4	SOW	0.78	PF1155-OST-20	PF2155-OST-20

Single phase models require **Capacitor/Relay Pack PF73301**, available for panels by others.

Seal Leak Sensor Relay kit PF0861 & **Temperature Sensor Relay Kit PF0876** are available for panels by others.

Models: PF4N4524, PF4NC4534, PF4NC4544, PF4NC4564, PF4NC7524, PF4NC7534, PF4NC7544, PF4NC7564, PF4NC11334, PF4NC11344, PF4NC11364, PF4NC15034, PF4NC15044

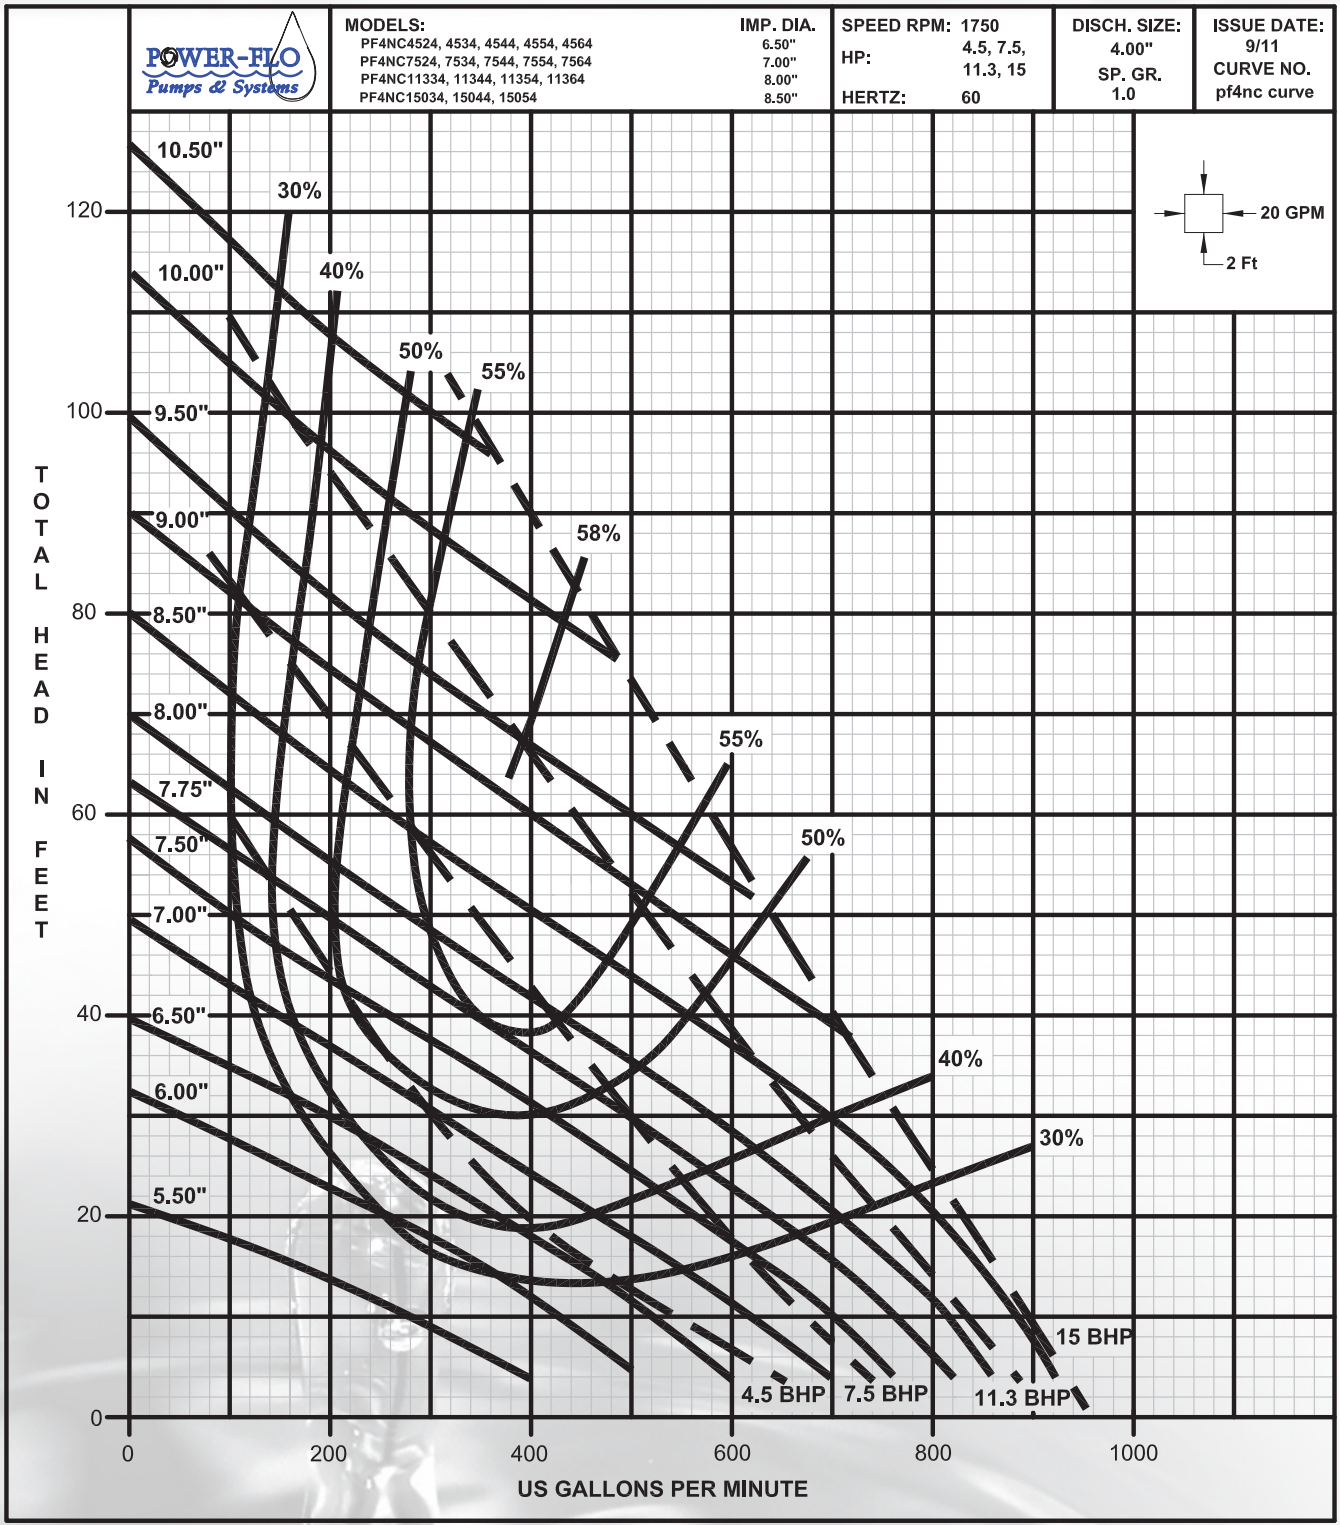

4" Non-Clog Pumps - 4.5, 7.5, 11.3 & 15HP - 1750RPM - 60HZ

