



**WITHOUT
YOU
THERE IS
NO US.**




AutoPAC



AutoPAC

23000 | 24000 Series

AutoPAC

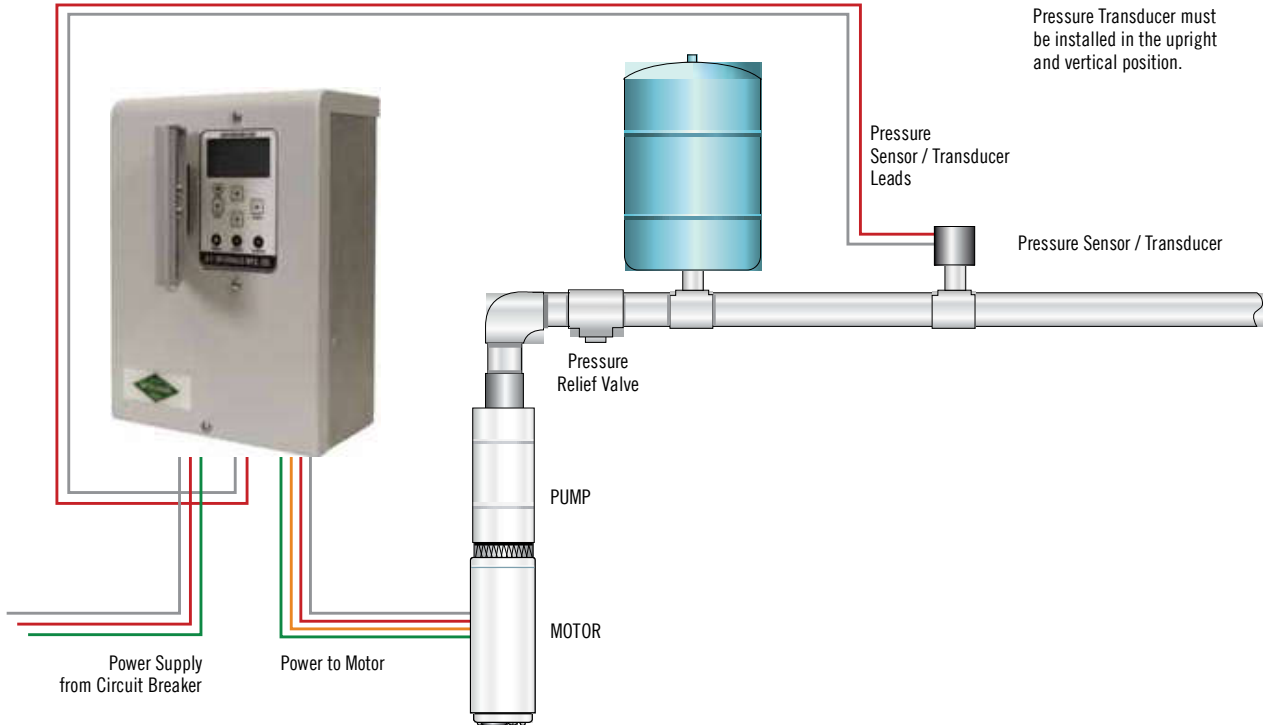

A.Y. Model	Part #	Single-Phase			Three-Phase		
		115V 2-Wire	230V 2-Wire	230V 3-Wire	230V 3-Wire	230V 3-Wire	230V 3-Wire
		1/2HP	1/2 - 1 1/2 HP	1/2 - 2HP	1/2 - 2 HP	3 HP	5 HP
SD1-2HP2PS	6619-018	X	X	X			
SD1-2HP2	6619-019	X	X	X			
SD3-2HP2	6619-020				X		
SD3-3HP2	6619-021				X	X	
SD3-5HP2	6619-022				X	X	X

AutoDRIVE - Reliability On-Demand

Constant Pressure

- Reduced tank size
- Quick & simple installation

Easy Setup

- Setup constant pressure in 5 steps or less

Large Graphic Display

- Bright backlit screen
- Visible in direct sunlight

Rugged & Compact

- NEMA 3R steel enclosure
- Rated to 122°F, (104°F for SD3-5HP2)

Feature Set | Power Behind The Pump

- Feature set provides complete control capability for all pumping applications

How to Order the AutoPAC

Order by Model Number - Example: 23050J2Z-APS

23

Series

23 - Domestic Stainless Steel
24 - Stainless Steel

050

Horsepower

050 - 1/2 HP
075 - 3/4 HP
100 - 1 HP
150 - 1 1/2 HP
200 - 2 HP
300 - 3 HP
500 - 5 HP

J

GPM

J - 5 GPM
V - 7 GPM
K - 10 GPM
L - 15 GPM
P - 20 GPM
M - 25 GPM
R - 35 GPM
G - 40 GPM
S - 55 GPM
Q - 60 GPM
T - 80 GPM

2

Wires

Two wire or
Three wire

Z

Other

Leave blank for 230V
Z - 230V Three Phase

APS

Pressure Switch / Transducer

APS - Pressure Switch
APT - Transducer

NOTES

- AutoPAC motor horsepower is balanced with pump end horsepower
Example: 2 HP motor designed with a 2 HP pump end

AutoPAC Package



AutoPAC Pressure Switch / Transducer



Part No.	Description
6619-028	SDREPT TRANSDUCER W/10' WIRE



Part No.	Description
6619-029	SDREPPSW PRESSURE SWITCH WITH WIRE

AutoPAC

Enclosure Overview

AutoPAC



Technical Specifications - Single Phase

Physical / Environmental	
Operating Temperature Range	1/2 HP to 2 HP -20°C to 50°C (-4 F to 122°F)
Storage Temperature Range	-30°C to 60°C (-22°F to 140°F)
Enclosure	NEMA Type 3R: Outdoor Rainproof
Altitude	Derate by 5 °C every 2000 ft over 5500 ft of elevation
Dimensions	12.25 in x 9.25 in x 4.68 in
Weight	13 lbs
Specifications	
Model Number	SD1-2HP2PS SD1-2HP2
Horsepower	1/3 HP to 2 HP
Motor Style	2-Wire or 3-Wire
Rated Current	
Rated Input Current	Max: 28 A
Rated Output Current	Max: 16 A
Input Power	
Input Phase	Single Phase
Input Voltage	115 / 230 VAC
Input Voltage Range	90V to 160V 180V to 260V
Input Frequency	60 Hz

Output Power	
Output Phase	Single Phase
Output Voltage	Equal to input
Output Frequency	5 Hz to 120 Hz
Horsepower	1/3 HP to 2 HP
Switching Frequency	2 kHz to 8 kHz
Output	V/f control
Electrical	
Short Circuit Withstand Rating	5 kA RMS Symmetrical Amps
Efficiency	95%
Startup Ramp Time	0 to 120 s
Shutdown Ramp Time	0 to 120 s or Coast To Stop
Overload Capacity	150% for 2 s
	<i>Rated output current for 2 HP model based on typical full load current for submersible motors.</i>
Digital Inputs	
Quantity	Two Programmable
Ratings	<15 V 7 mA Galvanically Isolated
Analog Inputs	
Quantity	Two Programmable
Current Reference	4-20 mA One Input
Voltage Reference	0 to 5 VDC One Input
Terminal Block Size	24 to 16 AWG

AutoPAC

Enclosure Overview

AutoPAC



Technical Specifications - Three Phase


Physical / Environmental	
Operating Temperature Range	-20°C to 50°C (-4°F to 122°F) -20°C to 40°C (-4°F to 104°F)
Storage Temperature Range	-30°C to 60°C (-22°F to 140°F)
Enclosure	NEMA Type 3R: Outdoor I Rainproof
Altitude	Derate by 5 °C every 2000 ft over 5500 ft of elevation
Dimensions	12.25 in x 9.25 in x 4.68 in
Weight	13 lbs
Specifications	
Model Number	SD3-2HP2 SD3-3HP2 SD3-5HP2
Horsepower	2 HP, 3 HP, 5 HP
Motor Style	3-Wire
Rated Current	
Rated Input Current	Max: 20 A, 30 A, 42 A
Rated Output Current	Max: 11 A, 13 A, 22 A
Input Power	
Input Phase	Single Phase
Input Voltage	230 VAC
Input Voltage Range	190V to 275V
Input Frequency	60 Hz

Output Power	
Output Phase	Three Phase
Output Voltage	230V
Output Voltage Range	190V - 275V
Output Frequency	5 Hz to 300 Hz
Horsepower	2 HP to 5 HP
Switching Frequency	2 kHz to 8 kHz
Output	V/f control
Electrical	
Short Circuit Withstand Rating	5 kA RMS Symmetrical Amps
Efficiency	95%
Startup Ramp Time	1 to 120 s
Shutdown Ramp Time	1 to 120 s or Coast To Stop
Overload Capacity	120% for 60 s
Analog Inputs	
Quantity	Two Programmable
Current Reference	4-20 mA Two Input
Voltage Reference	0 to 5 VDC One Input
Terminal Block Size	24 to 16 AWG

AutoPACs 5 GPM

23000 SERIES

AutoPAC

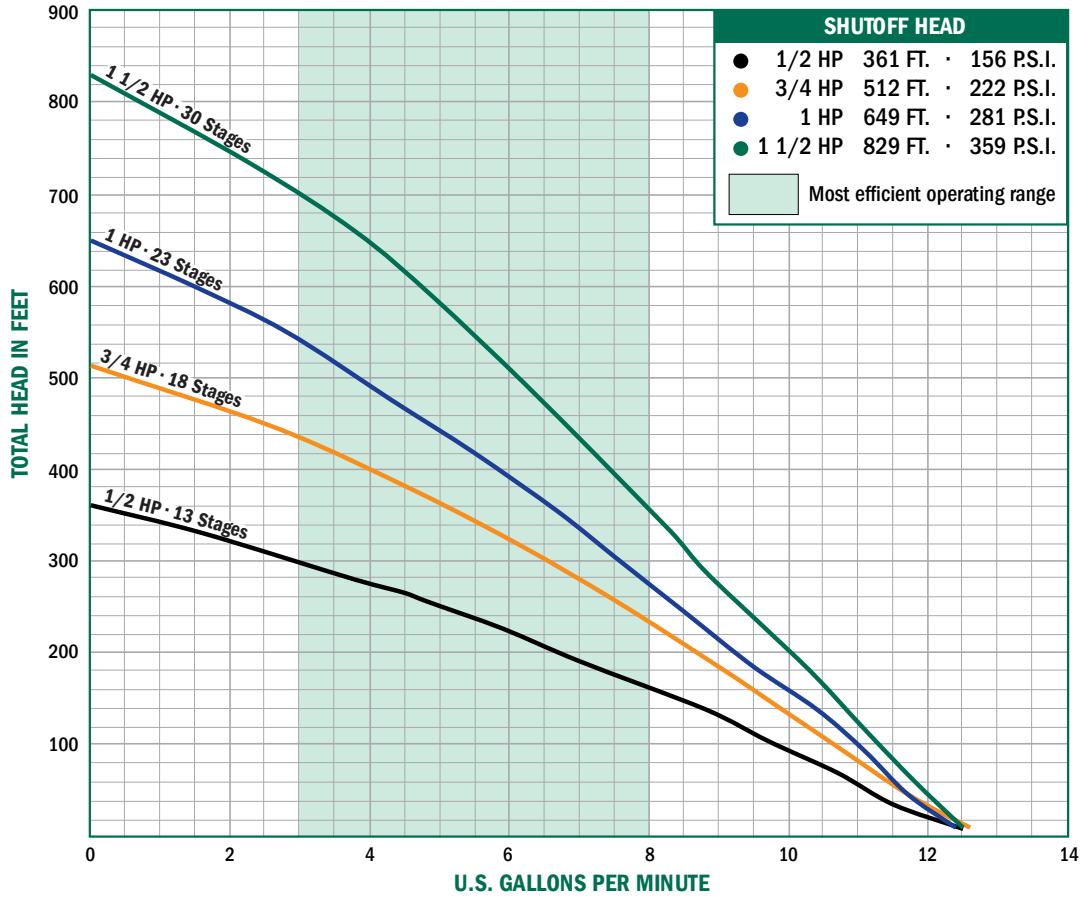

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-583	23050J2-APS	1/2 HP	13	230V	44
6630-595	23075J2-APS	3/4 HP	18	230V	47
6630-607	23100J2-APS	1 HP	23	230V	55
6630-619	23150J2-APS	1 1/2 HP	30	230V	64

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-631	23050J3-APS	1/2 HP	13	230V	42
6630-643	23075J3-APS	3/4 HP	18	230V	44
6630-655	23100J3-APS	1 HP	23	230V	54
6630-667	23150J3-APS	1 1/2 HP	30	230V	63

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-577	23050J2-APT	1/2 HP	13	230V	44
6630-589	23075J2-APT	3/4 HP	18	230V	47
6630-601	23100J2-APT	1 HP	23	230V	55
6630-613	23150J2-APT	1 1/2 HP	30	230V	64

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-625	23050J3-APT	1/2 HP	13	230V	42
6630-637	23075J3-APT	3/4 HP	18	230V	44
6630-649	23100J3-APT	1 HP	23	230V	54
6630-661	23150J3-APT	1 1/2 HP	30	230V	63


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-849	23150J3Z-APT	1 1/2 HP	30	230V	56

AutoPACs 5 GPM

24000 SERIES

AutoPAC

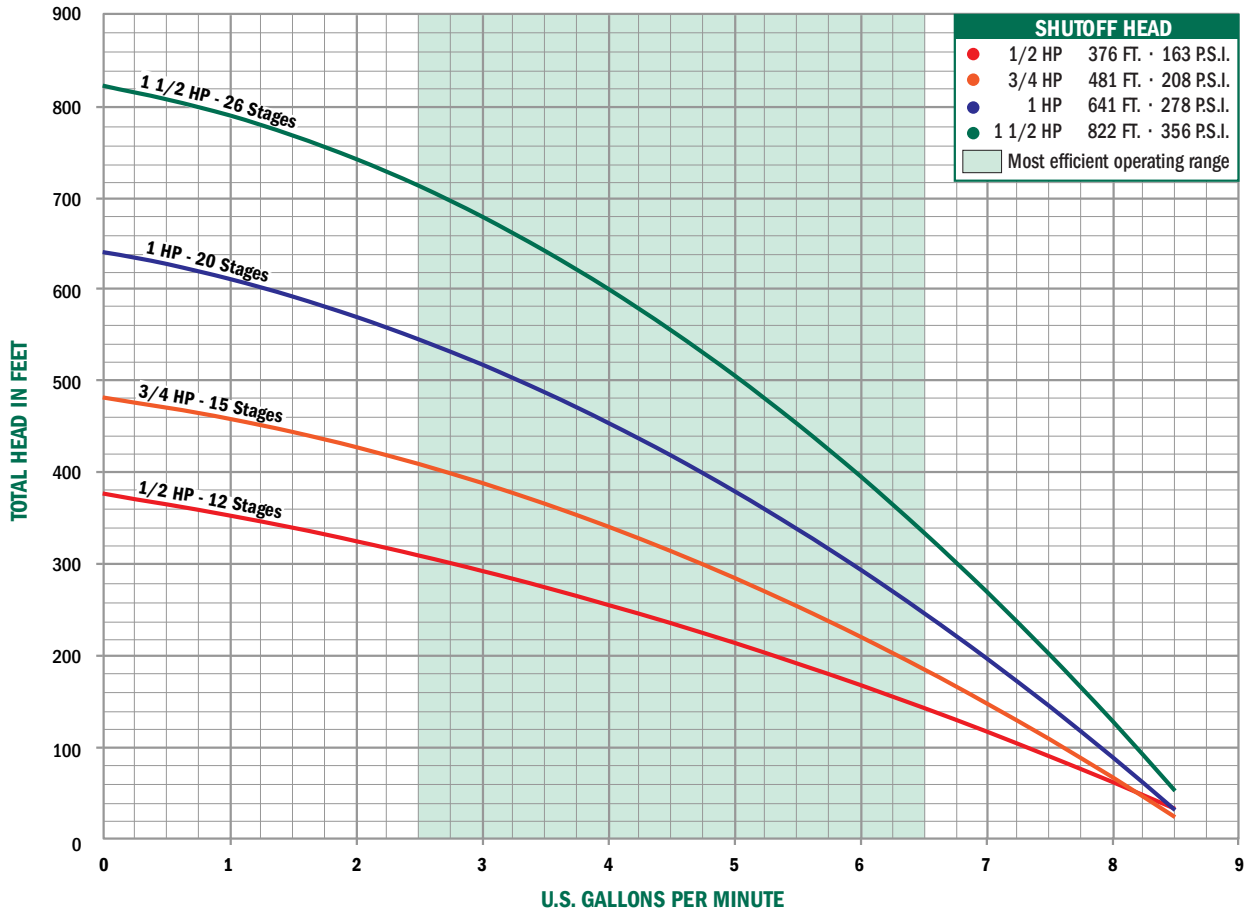

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-701	24050J2-APS	1/2 HP	12	230V	43
6630-711	24075J2-APS	3/4 HP	15	230V	46
6630-722	24100J2-APS	1 HP	20	230V	53
6630-734	24150J2-APS	1 1/2 HP	26	230V	62

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-696	24050J2-APT	1/2 HP	12	230V	43
6630-706	24075J2-APT	3/4 HP	15	230V	46
6630-716	24100J2-APT	1 HP	20	230V	53
6630-728	24150J2-APT	1 1/2 HP	26	230V	62

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-745	24050J3-APS	1/2 HP	12	230V	41
6630-755	24075J3-APS	3/4 HP	15	230V	46
6630-766	24100J3-APS	1 HP	20	230V	52
6630-778	24150J3-APS	1 1/2 HP	26	230V	61

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-740	24050J3-APT	1/2 HP	12	230V	41
6630-750	24075J3-APT	3/4 HP	15	230V	43
6630-760	24100J3-APT	1 HP	20	230V	52
6630-772	24150J3-APT	1 1/2 HP	26	230V	61


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-855	24150J3Z-APT	1 1/2 HP	26	230V	54

AutoPACs 7 GPM

23000 SERIES

AutoPAC

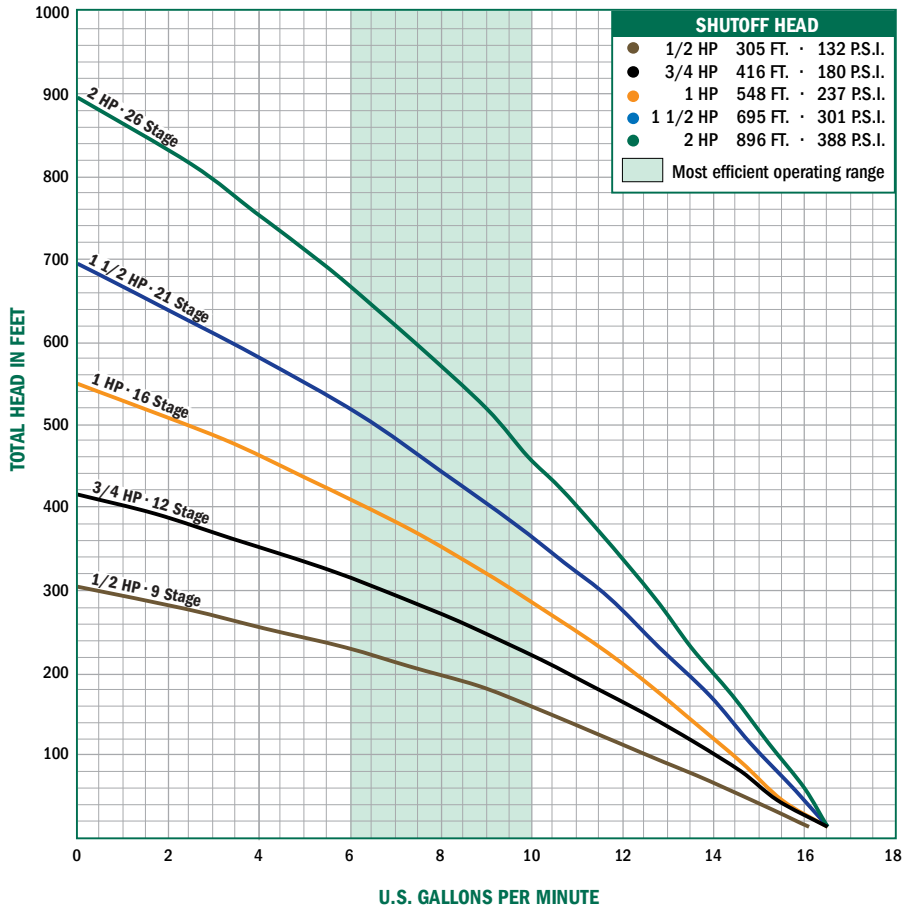

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-584	23050V2-APS	1/2 HP	9	230V	43
6630-596	23075V2-APS	3/4 HP	12	230V	46
6630-608	23100V2-APS	1 HP	16	230V	52
6630-620	23150V2-APS	1 1/2 HP	21	230V	59

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-632	23050V3-APS	1/2 HP	9	230V	41
6630-644	23075V3-APS	3/4 HP	12	230V	43
6630-656	23100V3-APS	1 HP	16	230V	51
6630-668	23150V3-APS	1 1/2 HP	21	230V	58
6630-678	23200V3-APS	2 HP	26	230V	61

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-578	23050V2-APT	1/2 HP	9	230V	43
6630-590	23075V2-APT	3/4 HP	12	230V	46
6630-602	23100V2-APT	1 HP	16	230V	52
6630-614	23150V2-APT	1 1/2 HP	21	230V	59

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-626	23050V3-APT	1/2 HP	9	230V	41
6630-638	23075V3-APT	3/4 HP	12	230V	43
6630-650	23100V3-APT	1 HP	16	230V	51
6630-662	23150V3-APT	1 1/2 HP	21	230V	58
6630-673	23200V3-APT	2 HP	26	230V	61


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-850	23150V3Z-APT	1 1/2 HP	21	230V	51
6630-683	23200V3Z-APT	2 HP	26	230V	59

AutoPACs 7 GPM

24000 SERIES

AutoPAC

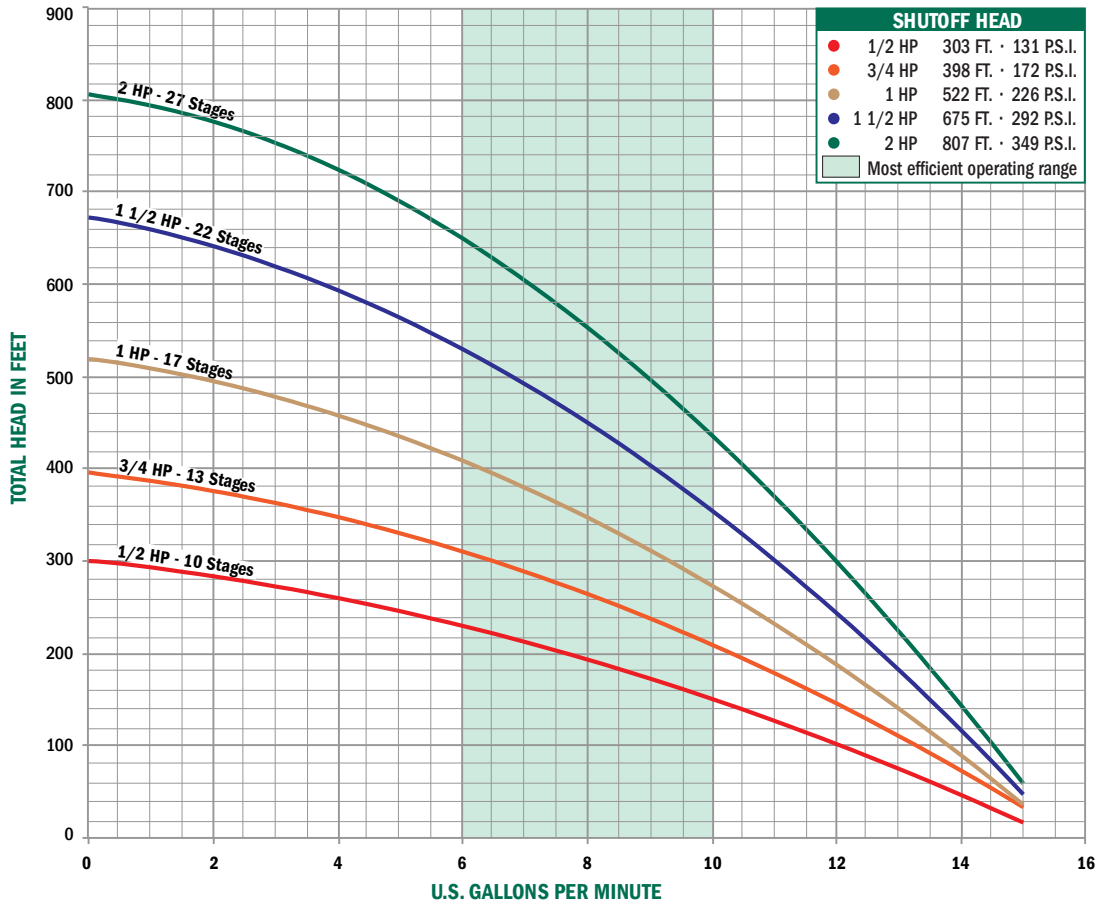

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-702	24050V2-APS	1/2 HP	10	230V	42
6630-712	24075V2-APS	3/4 HP	13	230V	45
6630-723	24100V2-APS	1 HP	17	230V	53
6630-735	24150V2-APS	1 1/2 HP	22	230V	60

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-697	24050V2-APT	1/2 HP	10	230V	42
6630-707	24075V2-APT	3/4 HP	13	230V	45
6630-717	24100V2-APT	1 HP	17	230V	53
6630-729	24150V2-APT	1 1/2 HP	22	230V	60

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-746	24050V3-APS	1/2 HP	10	230V	40
6630-756	24075V3-APS	3/4 HP	13	230V	42
6630-767	24100V3-APS	1 HP	17	230V	52
6630-779	24150V3-APS	1 1/2 HP	22	230V	59
6630-789	24200V3-APS	2 HP	27	230V	61

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-741	24050V3-APT	1/2 HP	10	230V	40
6630-751	24075V3-APT	3/4 HP	13	230V	42
6630-761	24100V3-APT	1 HP	17	230V	52
6630-773	24150V3-APT	1 1/2 HP	22	230V	59
6630-784	24200V3-APT	2 HP	27	230V	61


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-856	24150V3Z-APT	1 1/2 HP	22	230V	52
6630-794	24200V3Z-APT	2 HP	27	230V	59

AutoPACs 10 GPM

23000 SERIES

AutoPAC

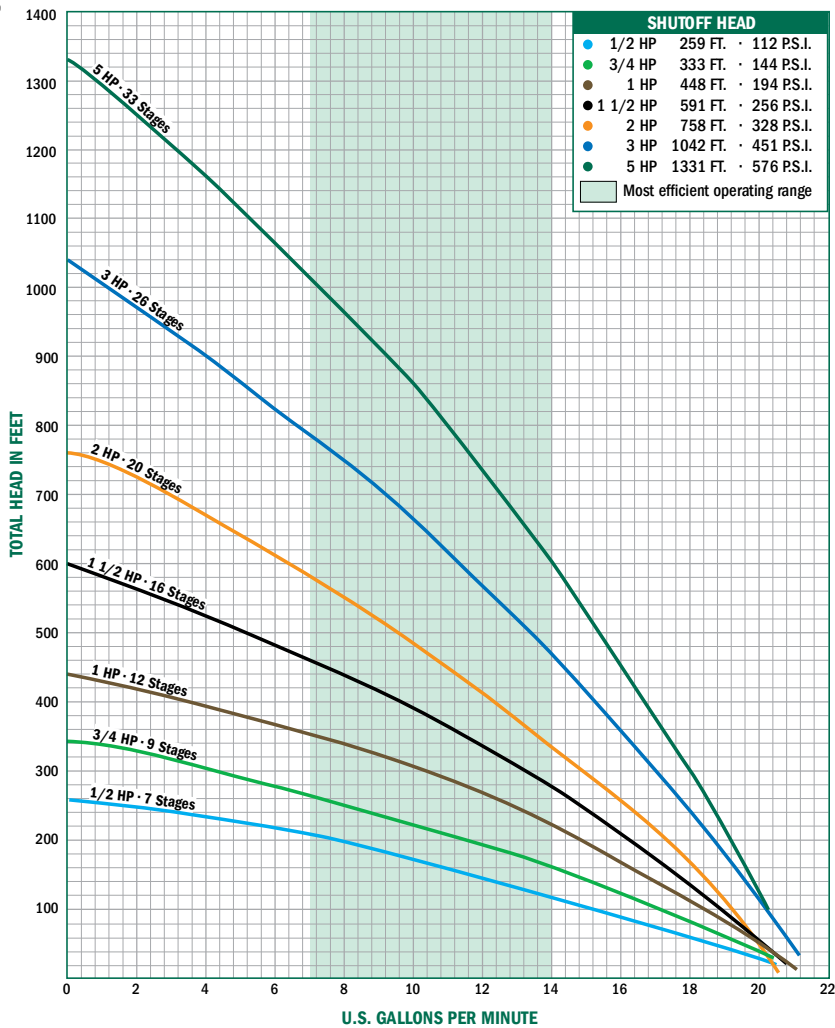

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-585	23050K2-APS	1/2 HP	7	230V	42
6630-597	23075K2-APS	3/4 HP	9	230V	49
6630-609	23100K2-APS	1 HP	12	230V	50
6630-621	23150K2-APS	1 1/2 HP	16	230V	58

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-633	23050K3-APS	1/2 HP	7	230V	40
6630-645	23075K3-APS	3/4 HP	9	230V	42
6630-657	23100K3-APS	1 HP	12	230V	49
6630-669	23150K3-APS	1 1/2 HP	16	230V	57
6630-679	23200K3-APS	2 HP	20	230V	59

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-579	23050K2-APT	1/2 HP	7	230V	42
6630-591	23075K2-APT	3/4 HP	9	230V	45
6630-603	23100K2-APT	1 HP	12	230V	50
6630-615	23150K2-APT	1 1/2 HP	16	230V	58

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-627	23050K3-APT	1/2 HP	7	230V	40
6630-639	23075K3-APT	3/4 HP	9	230V	42
6630-651	23100K3-APT	1 HP	12	230V	49
6630-663	23150K3-APT	1 1/2 HP	16	230V	57
6630-674	23200K3-APT	2 HP	20	230V	59

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-851	23150K3Z-APT	1 1/2 HP	16	230V	50
6630-684	23200K3Z-APT	2 HP	20	230V	57
*6630-688	23300K3Z-APT	3 HP	26	230V	70
*6630-692	23500K3Z-APT	5 HP	33	230V	83

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 10 GPM

24000 SERIES

AutoPAC

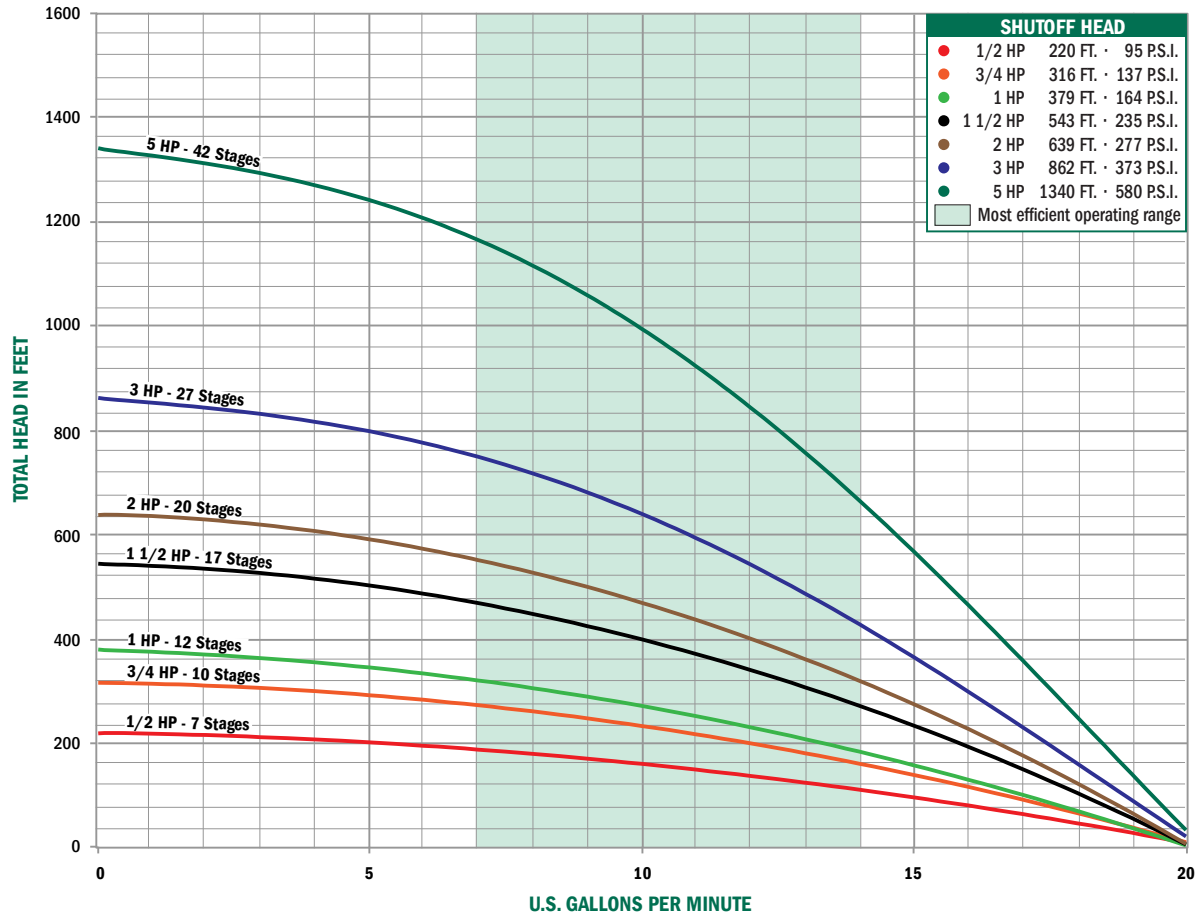

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-703	24050K2-APS	1/2 HP	7	230V	42
6630-713	24075K2-APS	3/4 HP	10	230V	45
6630-724	24100K2-APS	1 HP	12	230V	50
6630-736	24150K2-APS	1 1/2 HP	17	230V	57

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-698	24050K2-APT	1/2 HP	7	230V	42
6630-708	24075K2-APT	3/4 HP	10	230V	45
6630-718	24100K2-APT	1 HP	12	230V	50
6630-730	24150K2-APT	1 1/2 HP	17	230V	57

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-747	24050K3-APS	1/2 HP	7	230V	40
6630-757	24075K3-APS	3/4 HP	10	230V	42
6630-768	24100K3-APS	1 HP	12	230V	49
6630-780	24150K3-APS	1 1/2 HP	17	230V	56
6630-790	24200K3-APS	2 HP	20	230V	57

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-742	24050K3-APT	1/2 HP	7	230V	40
6630-752	24075K3-APT	3/4 HP	10	230V	42
6630-762	24100K3-APT	1 HP	12	230V	49
6630-774	24150K3-APT	1 1/2 HP	17	230V	56
6630-785	24200K3-APT	2 HP	20	230V	57

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-857	24150K3Z-APT	1 1/2 HP	17	230V	49
6630-795	24200K3Z-APT	2 HP	20	230V	55
*6630-799	24300K3Z-APT	3 HP	27	230V	69
*6630-803	24500K3Z-APT	5 HP	42	230V	90

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 15 GPM

23000 SERIES

AutoPAC

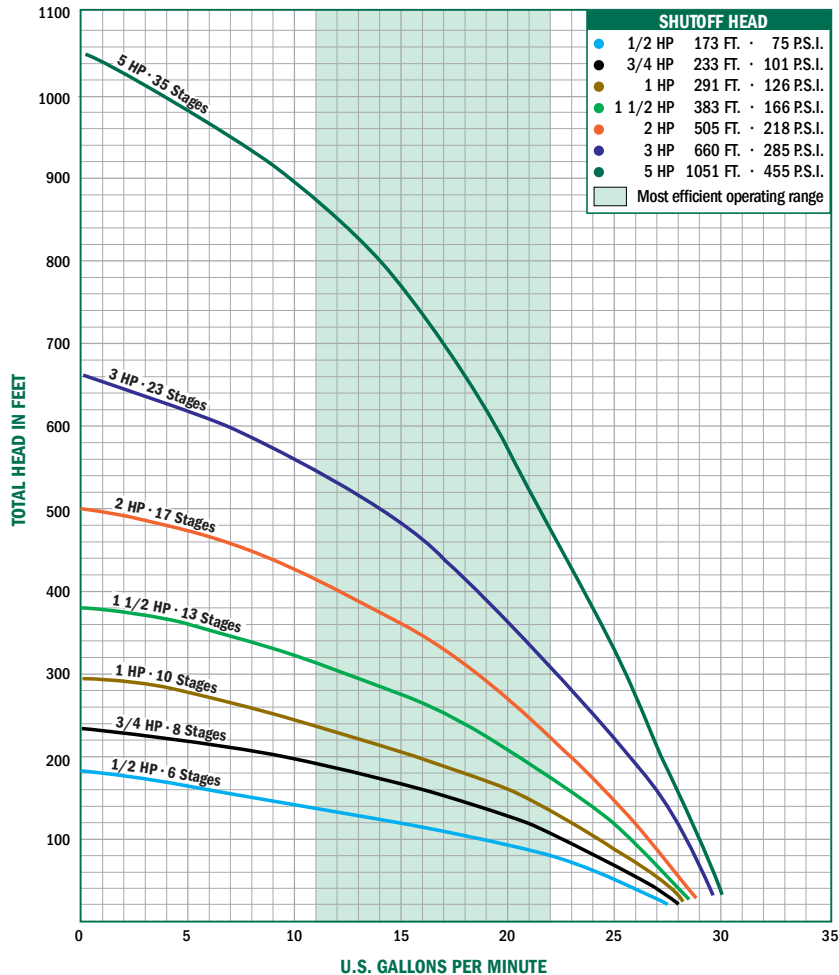

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-586	23050L2-APS	1/2 HP	6	230V	42
6630-598	23075L2-APS	3/4 HP	8	230V	45
6630-610	23100L2-APS	1 HP	10	230V	50
6630-622	23150L2-APS	1 1/2 HP	13	230V	57

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-580	23050L2-APT	1/2 HP	6	230V	42
6630-592	23075L2-APT	3/4 HP	8	230V	45
6630-604	23100L2-APT	1 HP	10	230V	50
6630-616	23150L2-APT	1 1/2 HP	13	230V	57

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-634	23050L3-APS	1/2 HP	6	230V	40
6630-646	23075L3-APS	3/4 HP	8	230V	42
6630-658	23100L3-APS	1 HP	10	230V	49
6630-670	23150L3-APS	1 1/2 HP	13	230V	56
6630-680	23200L3-APS	2 HP	17	230V	58

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-628	23050L3-APT	1/2 HP	6	230V	40
6630-640	23075L3-APT	3/4 HP	8	230V	42
6630-652	23100L3-APT	1 HP	10	230V	49
6630-664	23150L3-APT	1 1/2 HP	13	230V	56
6630-675	23200L3-APT	2 HP	17	230V	58

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-885	23100L3Z-APT	1 HP	10	230V	50
6630-852	23150L3Z-APT	1 1/2 HP	13	230V	49
6630-685	23200L3Z-APT	2 HP	17	230V	56
*6630-689	23300L3Z-APT	3 HP	23	230V	69
*6630-693	23500L3Z-APT	5 HP	35	230V	85

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 15 GPM

24000 SERIES

AutoPAC

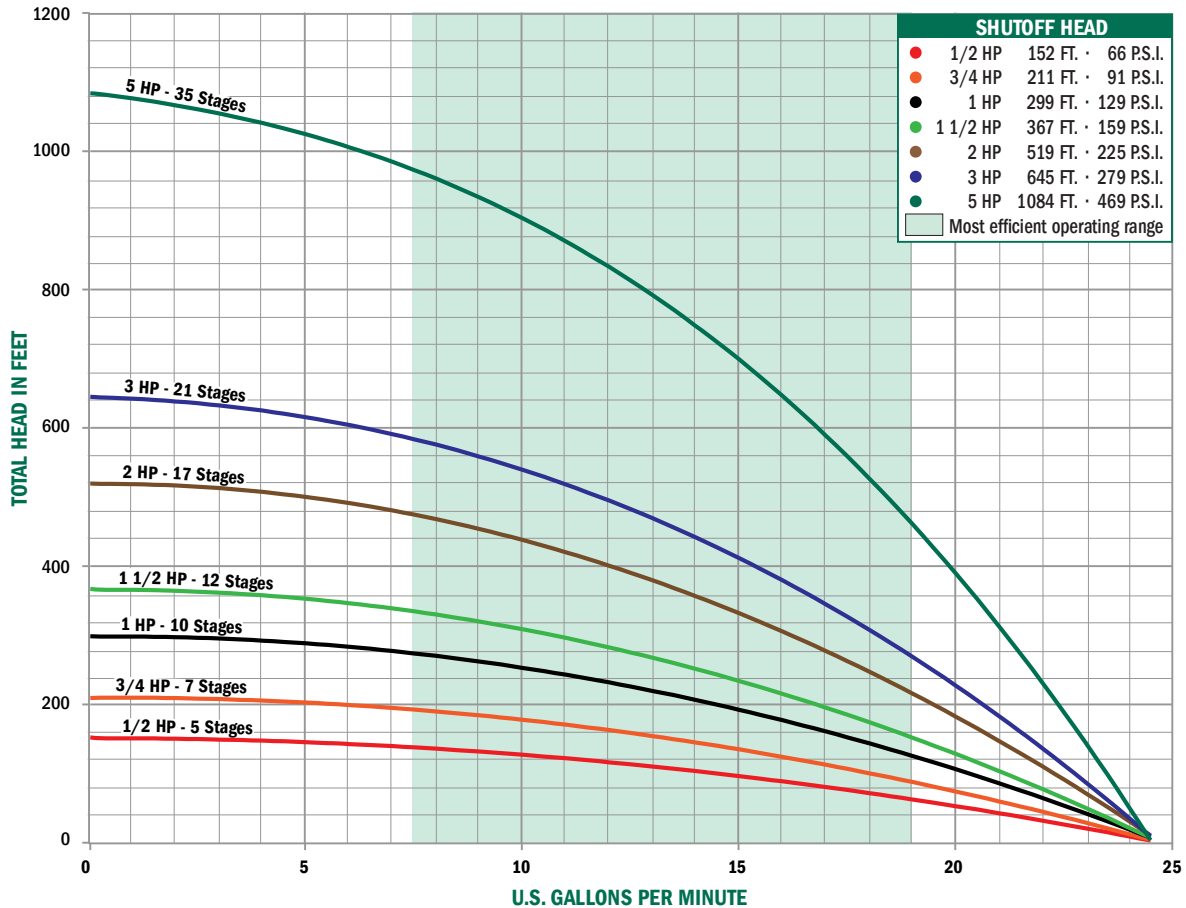

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-704	24050L2-APS	1/2 HP	5	230V	41
6630-714	24075L2-APS	3/4 HP	7	230V	44
6630-725	24100L2-APS	1 HP	10	230V	50
6630-737	24150L2-APS	1 1/2 HP	12	230V	56

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-699	24050L2-APT	1/2 HP	5	230V	41
6630-709	24075L2-APT	3/4 HP	7	230V	44
6630-719	24100L2-APT	1 HP	10	230V	50
6630-731	24150L2-APT	1 1/2 HP	12	230V	56

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-748	24050L3-APS	1/2 HP	5	230V	39
6630-758	24075L3-APS	3/4 HP	7	230V	41
6630-769	24100L3-APS	1 HP	10	230V	49
6630-781	24150L3-APS	1 1/2 HP	12	230V	55
6630-791	24200L3-APS	2 HP	17	230V	57

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-743	24050L3-APT	1/2 HP	5	230V	39
6630-753	24075L3-APT	3/4 HP	7	230V	41
6630-763	24100L3-APT	1 HP	10	230V	49
6630-775	24150L3-APT	1 1/2 HP	12	230V	55
6630-786	24200L3-APT	2 HP	17	230V	57

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-858	24150L3Z-APT	1 1/2 HP	12	230V	48
6630-796	24200L3Z-APT	2 HP	17	230V	55
*6630-800	24300L3Z-APT	3 HP	21	230V	66
*6630-804	24500L3Z-APT	5 HP	35	230V	86

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 20 GPM

23000 SERIES

AutoPAC

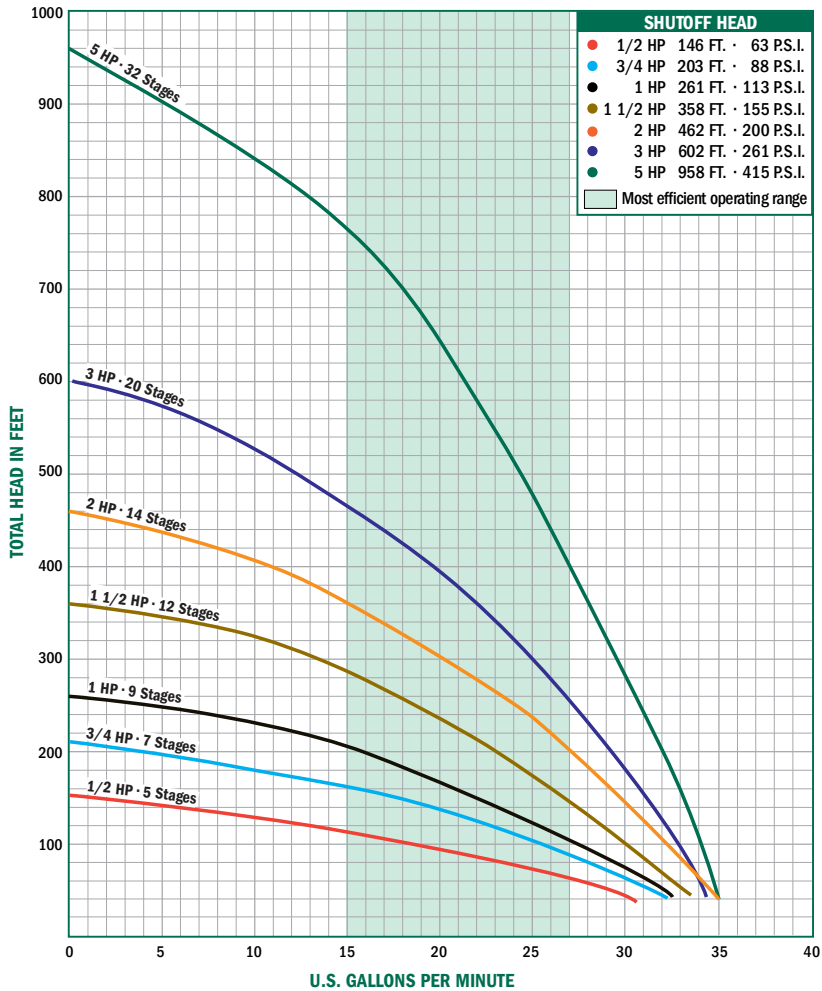

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-587	23050P2-APS	1/2 HP	5	230V	41
6630-599	23075P2-APS	3/4 HP	7	230V	44
6630-611	23100P2-APS	1 HP	9	230V	50
6630-623	23150P2-APS	1 1/2 HP	12	230V	56

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-581	23050P2-APT	1/2 HP	5	230V	41
6630-593	23075P2-APT	3/4 HP	7	230V	44
6630-605	23100P2-APT	1 HP	9	230V	50
6630-617	23150P2-APT	1 1/2 HP	12	230V	56

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-635	23050P3-APS	1/2 HP	5	230V	39
6630-647	23075P3-APS	3/4 HP	7	230V	41
6630-659	23100P3-APS	1 HP	9	230V	49
6630-671	23150P3-APS	1 1/2 HP	12	230V	55
6630-681	23200P3-APS	2 HP	14	230V	56

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-629	23050P3-APT	1/2 HP	5	230V	39
6630-641	23075P3-APT	3/4 HP	7	230V	41
6630-653	23100P3-APT	1 HP	9	230V	49
6630-665	23150P3-APT	1 1/2 HP	12	230V	55
6630-676	23200P3-APT	2 HP	14	230V	56

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-886	23100P3Z-APT	1 HP	9	230V	50
6630-853	23150P3Z-APT	1 1/2 HP	12	230V	48
6630-686	23200P3Z-APT	2 HP	14	230V	54
*6630-690	23300P3Z-APT	3 HP	20	230V	68
*6630-694	23500P3Z-APT	5 HP	32	230V	84

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 20 GPM

24000 SERIES

AutoPAC

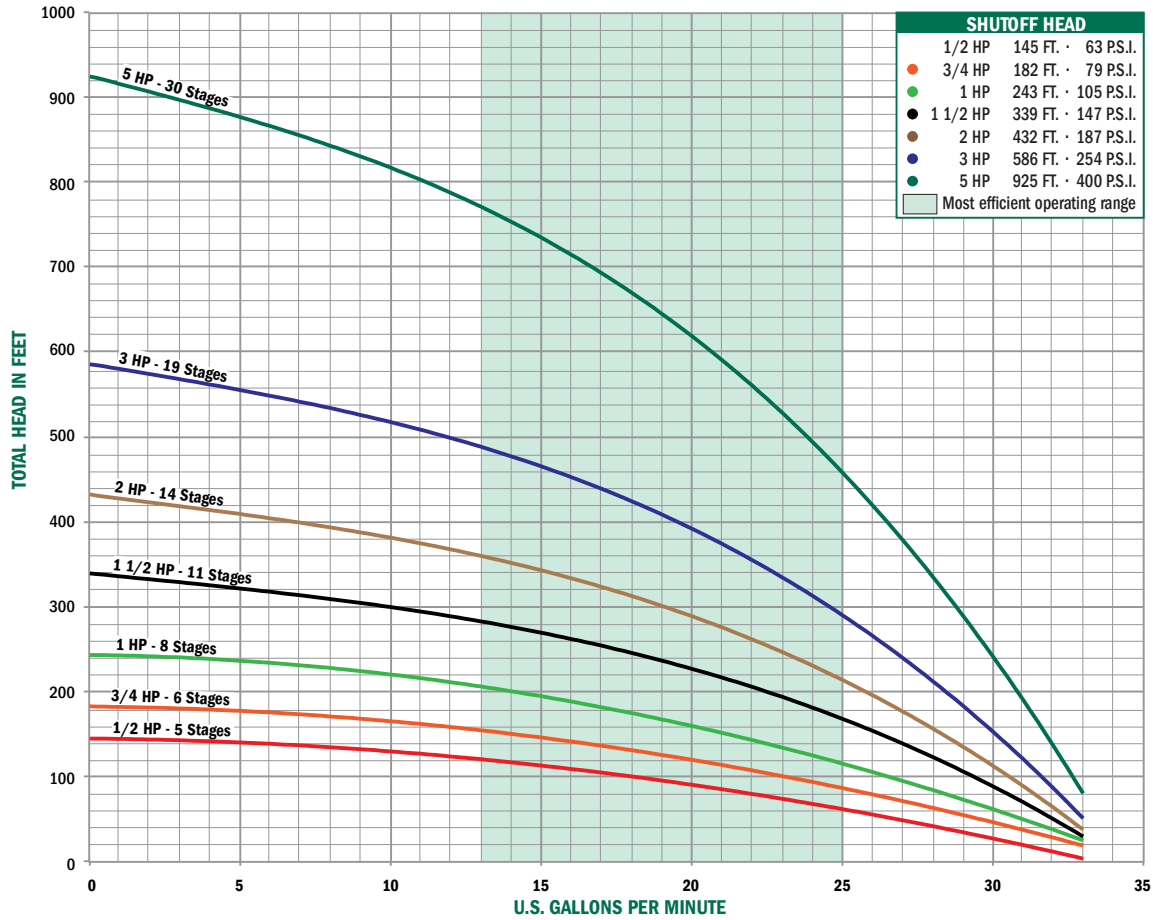

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-705	24050P2-APS	1/2 HP	5	230V	41
6630-715	24075P2-APS	3/4 HP	6	230V	43
6630-726	24100P2-APS	1 HP	8	230V	49
6630-738	24150P2-APS	1 1/2 HP	11	230V	56

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-700	24050P2-APT	1/2 HP	5	230V	41
6630-710	24075P2-APT	3/4 HP	6	230V	43
6630-720	24100P2-APT	1 HP	8	230V	49
6630-732	24150P2-APT	1 1/2 HP	11	230V	56

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-749	24050P3-APS	1/2 HP	5	230V	39
6630-759	24075P3-APS	3/4 HP	6	230V	40
6630-770	24100P3-APS	1 HP	8	230V	48
6630-782	24150P3-APS	1 1/2 HP	11	230V	55
6630-792	24200P3-APS	2 HP	14	230V	56

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-744	24050P3-APT	1/2 HP	5	230V	39
6630-754	24075P3-APT	3/4 HP	6	230V	40
6630-764	24100P3-APT	1 HP	8	230V	48
6630-776	24150P3-APT	1 1/2 HP	11	230V	55
6630-787	24200P3-APT	2 HP	14	230V	56

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-859	24150P3Z-APT	1 1/2 HP	11	230V	48
6630-797	24200P3Z-APT	2 HP	14	230V	54
*6630-801	24300P3Z-APT	3 HP	19	230V	67
*6630-805	24500P3Z-APT	5 HP	30	230V	86

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 25 GPM

23000 SERIES

AutoPAC

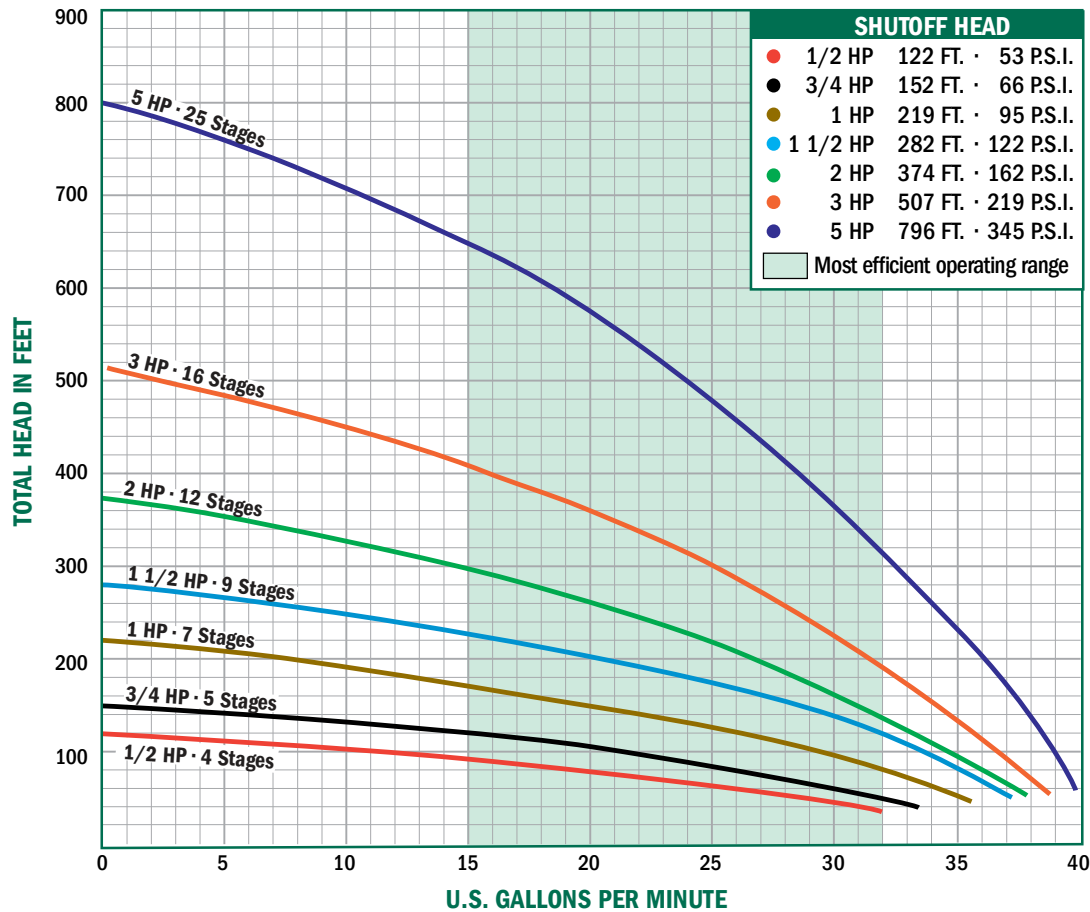

Stainless Steel - 23000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-588	23050M2-APS	1/2 HP	4	230V	41
6630-600	23075M2-APS	3/4 HP	5	230V	43
6630-612	23100M2-APS	1 HP	7	230V	49
6630-624	23150M2-APS	1 1/2 HP	9	230V	55

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-582	23050M2-APT	1/2 HP	4	230V	41
6630-594	23075M2-APT	3/4 HP	5	230V	43
6630-606	23100M2-APT	1 HP	7	230V	49
6630-618	23150M2-APT	1 1/2 HP	9	230V	55

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-636	23050M3-APS	1/2 HP	4	230V	39
6630-648	23075M3-APS	3/4 HP	5	230V	40
6630-660	23100M3-APS	1 HP	7	230V	48
6630-672	23150M3-APS	1 1/2 HP	9	230V	54
6630-682	23200M3-APS	2 HP	12	230V	56

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-630	23050M3-APT	1/2 HP	4	230V	39
6630-642	23075M3-APT	3/4 HP	5	230V	40
6630-654	23100M3-APT	1 HP	7	230V	48
6630-666	23150M3-APT	1 1/2 HP	9	230V	54
6630-677	23200M3-APT	2 HP	12	230V	56

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-887	23100M3Z-APT	1 HP	7	230V	50
6630-854	23150M3Z-APT	1 1/2 HP	9	230V	47
6630-687	23200M3Z-APT	2 HP	12	230V	54
*6630-691	23300M3Z-APT	3 HP	16	230V	65
*6630-695	23500M3Z-APT	5 HP	25	230V	80

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 25 GPM

24000 SERIES

AutoPAC

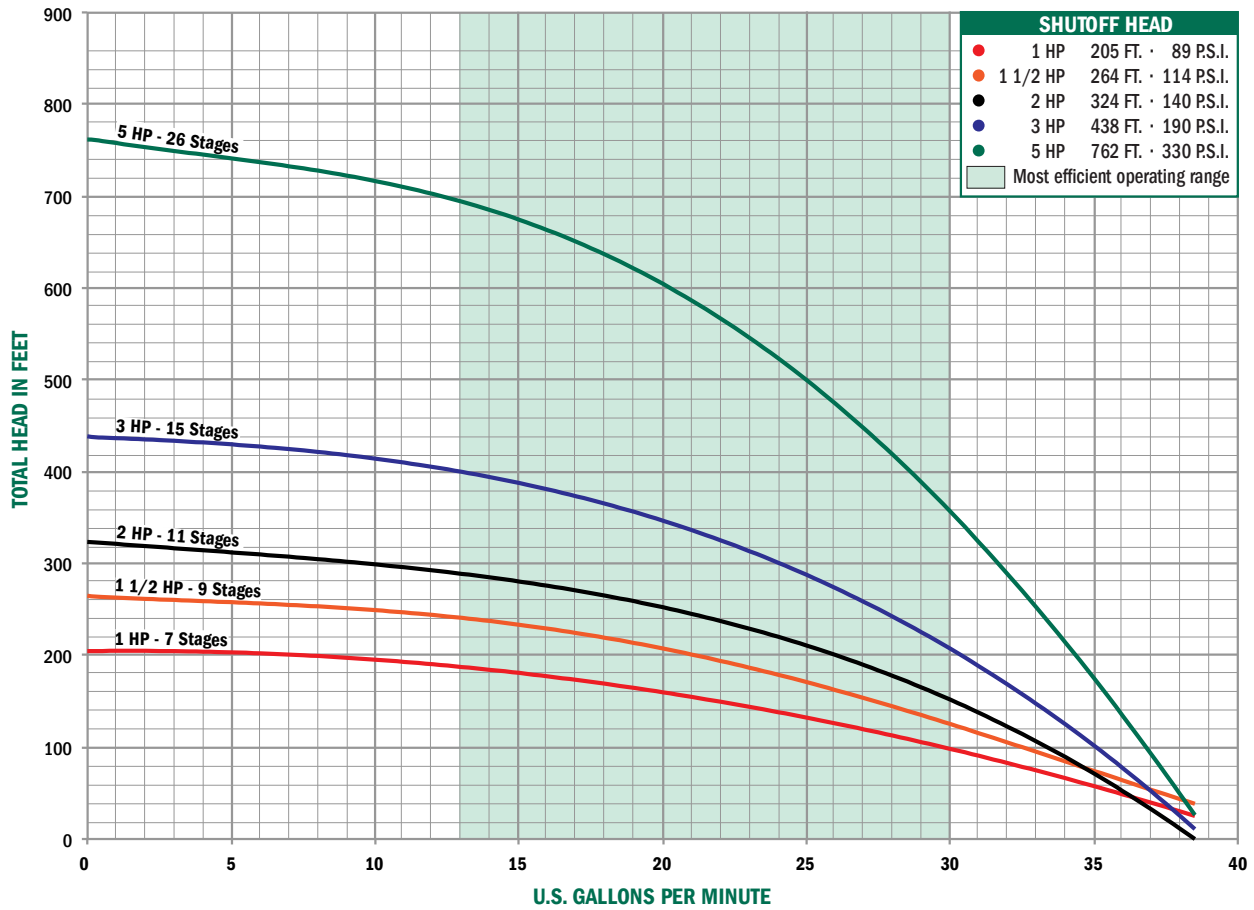

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-727	24100M2-APS	1 HP	7	230V	49
6630-739	24150M2-APS	1 1/2 HP	9	230V	55

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-721	24100M2-APT	1 HP	7	230V	49
6630-733	24150M2-APT	1 1/2 HP	9	230V	55

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-771	24100M3-APS	1 HP	7	230V	48
6630-783	24150M3-APS	1 1/2 HP	9	230V	54
6630-793	24200M3-APS	2 HP	11	230V	55

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-765	24100M3-APT	1 HP	7	230V	49
6630-777	24150M3-APT	1 1/2 HP	9	230V	54
6630-788	24200M3-APT	2 HP	11	230V	55

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-860	24150M3Z-APT	1 1/2 HP	9	230V	47
6630-798	24200M3Z-APT	2 HP	11	230V	53
*6630-802	24300M3Z-APT	3 HP	15	230V	66
*6630-806	24500M3Z-APT	5 HP	26	230V	86

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 35 GPM

24000 SERIES

AutoPAC

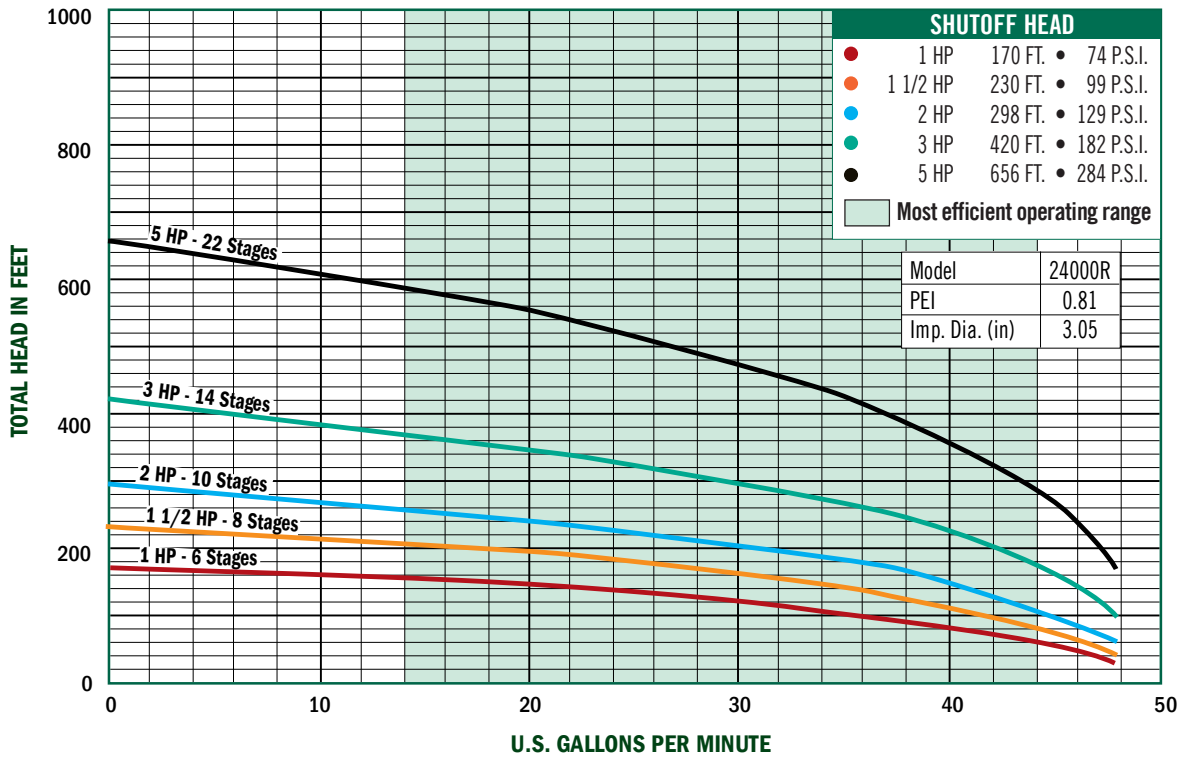

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-808	24100R2-APS	1 HP	6	230V	50
6630-813	24150R2-APS	1 1/2 HP	8	230V	56

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-818	24100R3-APS	1 HP	6	230V	49
6630-823	24150R3-APS	1 1/2 HP	8	230V	55
6630-831	24200R3-APS	2 HP	10	230V	56

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-807	24100R2-APT	1 HP	6	230V	50
6630-809	24150R2-APT	1 1/2 HP	8	230V	56

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-817	24100R3-APT	1 HP	6	230V	49
6630-819	24150R3-APT	1 1/2 HP	8	230V	55
6630-827	24200R3-APT	2 HP	10	230V	56


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-888	24100R3Z-APT	1 HP	6	230V	50
6630-861	24150R3Z-APT	1 1/2 HP	8	230V	48
6630-835	24200R3Z-APT	2 HP	10	230V	54
*6630-839	24300R3Z-APT	3 HP	14	230V	67
*6630-844	24500R3Z-APT	5 HP	22	230V	83

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 40 GPM

24000 SERIES

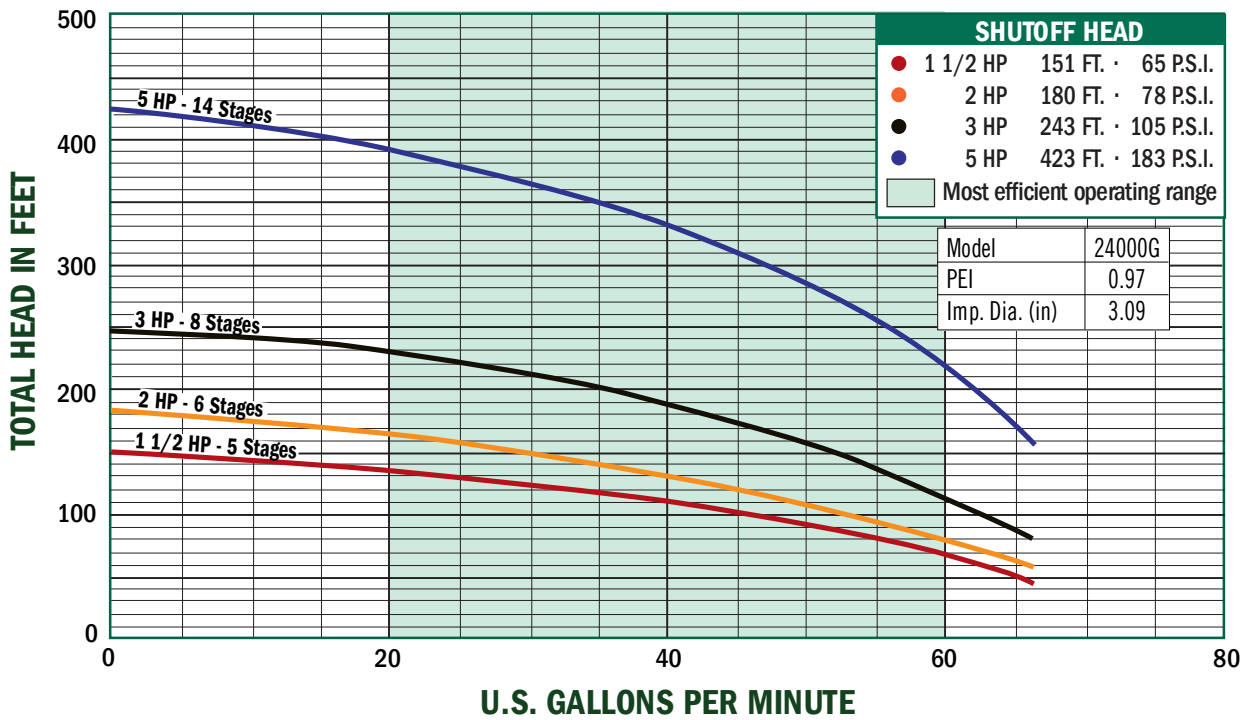

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-814	24150G2-APS	1 1/2 HP	5	230V	54

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-810	24150G2-APT	1 1/2 HP	5	230V	54

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-824	24150G3-APS	1 1/2 HP	5	230V	53
6630-832	24200G3-APS	2 HP	6	230V	54

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-820	24150G3-APT	1 1/2 HP	5	230V	53
6630-828	24200G3-APT	2 HP	6	230V	54

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-862	24150G3Z-APT	1 1/2 HP	5	230V	46
6630-836	24200G3Z-APT	2 HP	6	230V	52
*6630-840	24300G3Z-APT	3 HP	8	230V	63
*6630-845	24500G3Z-APT	5 HP	14	230V	78

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 55 GPM

24000 SERIES

AutoPAC

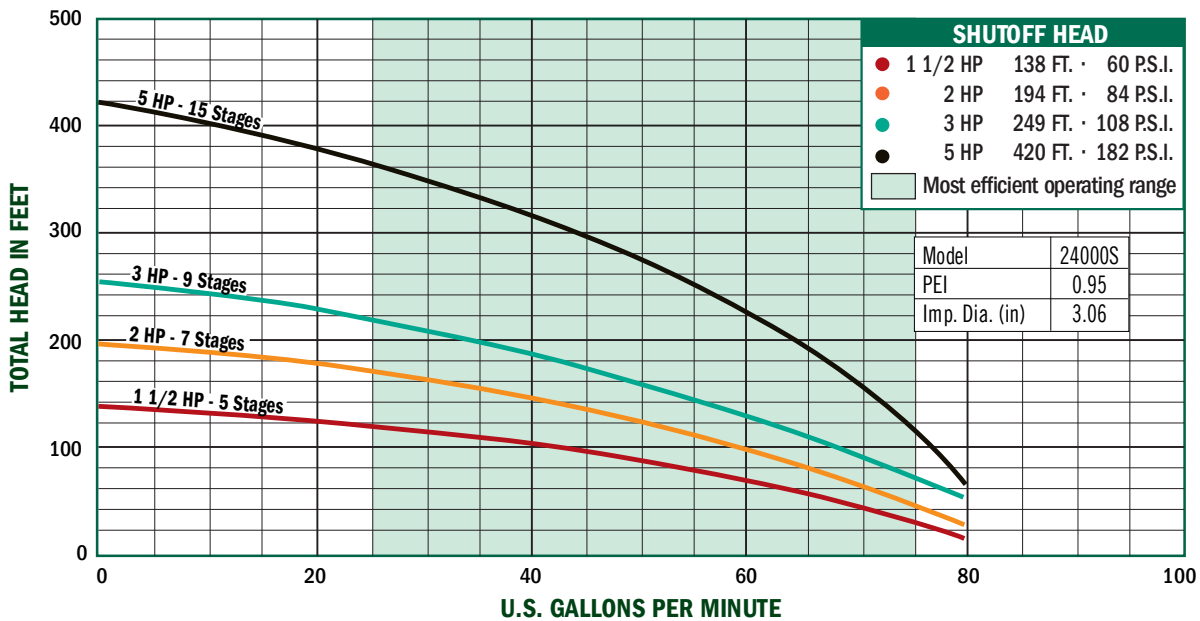

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-815	24150S2-APS	1 1/2 HP	5	230V	57

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-811	24150S2-APT	1 1/2 HP	5	230V	57

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-825	24150S3-APS	1 1/2 HP	5	230V	56
6630-833	24200S3-APS	2 HP	7	230V	58

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-821	24150S3-APT	1 1/2 HP	5	230V	56
6630-829	24200S3-APT	2 HP	7	230V	58


Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-863	24150S3Z-APT	1 1/2 HP	5	230V	49
6630-837	24200S3Z-APT	2 HP	7	230V	56
*6630-841	24300S3Z-APT	3 HP	9	230V	67
*6630-846	24500S3Z-APT	5 HP	15	230V	85

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 60 GPM

24000 SERIES

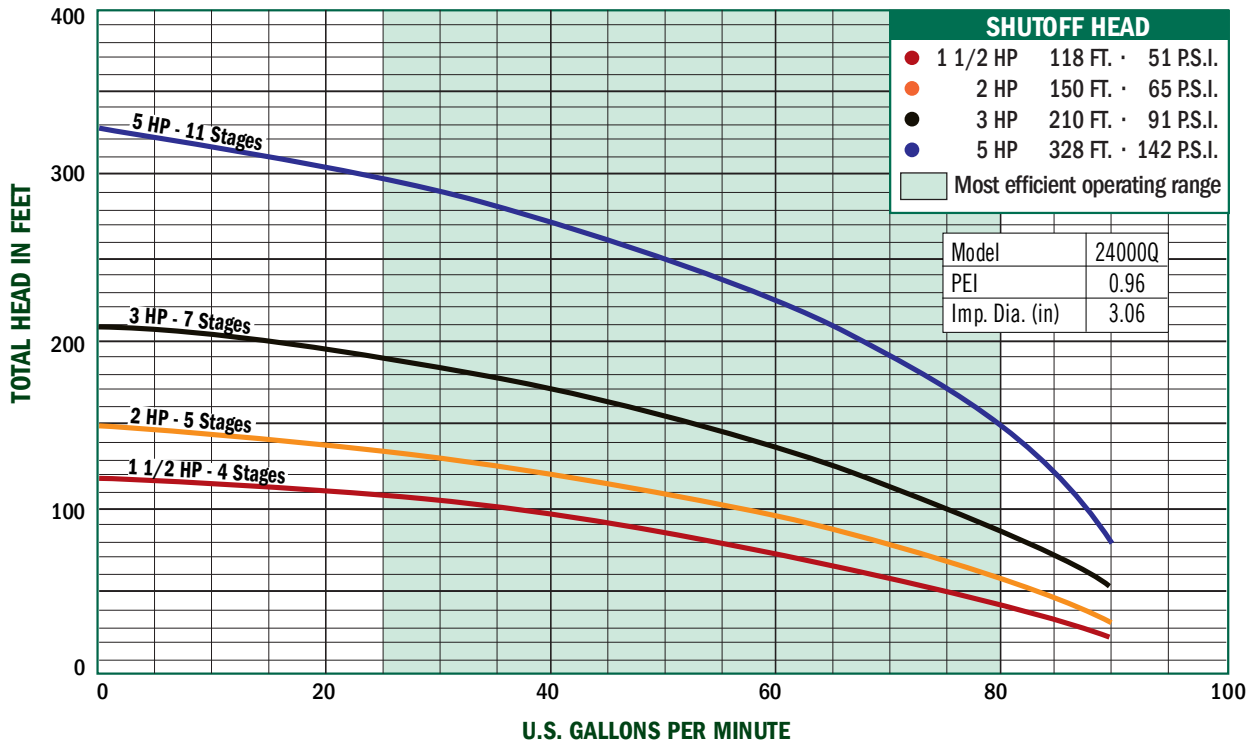

Stainless Steel - 24000 Series

Two Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-816	24150Q2-APS	1 1/2 HP	4	230V	56

Two Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-812	24150Q2-APT	1 1/2 HP	4	230V	56

Three Wire Single Phase, w/Pressure Switch

Part No.	Model No.	HP	Stages	Volt	WT.
6630-826	24150Q3-APS	1 1/2 HP	4	230V	55
6630-834	24200Q3-APS	2 HP	5	230V	56

Three Wire Single Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
6630-822	24150Q3-APT	1 1/2 HP	4	230V	55
6630-830	24200Q3-APT	2 HP	5	230V	56

Three Wire Three Phase, w/Transducer


Part No.	Model No.	HP	Stages	Volt	WT.
6630-864	24150Q3Z-APT	1 1/2 HP	4	230V	48
6630-838	24200Q3Z-APT	2 HP	5	230V	54
*6630-842	24300Q3Z-APT	3 HP	7	230V	66
*6630-847	24500Q3Z-APT	5 HP	11	230V	81

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)

AutoPACs 80 GPM

24000 SERIES

AutoPAC

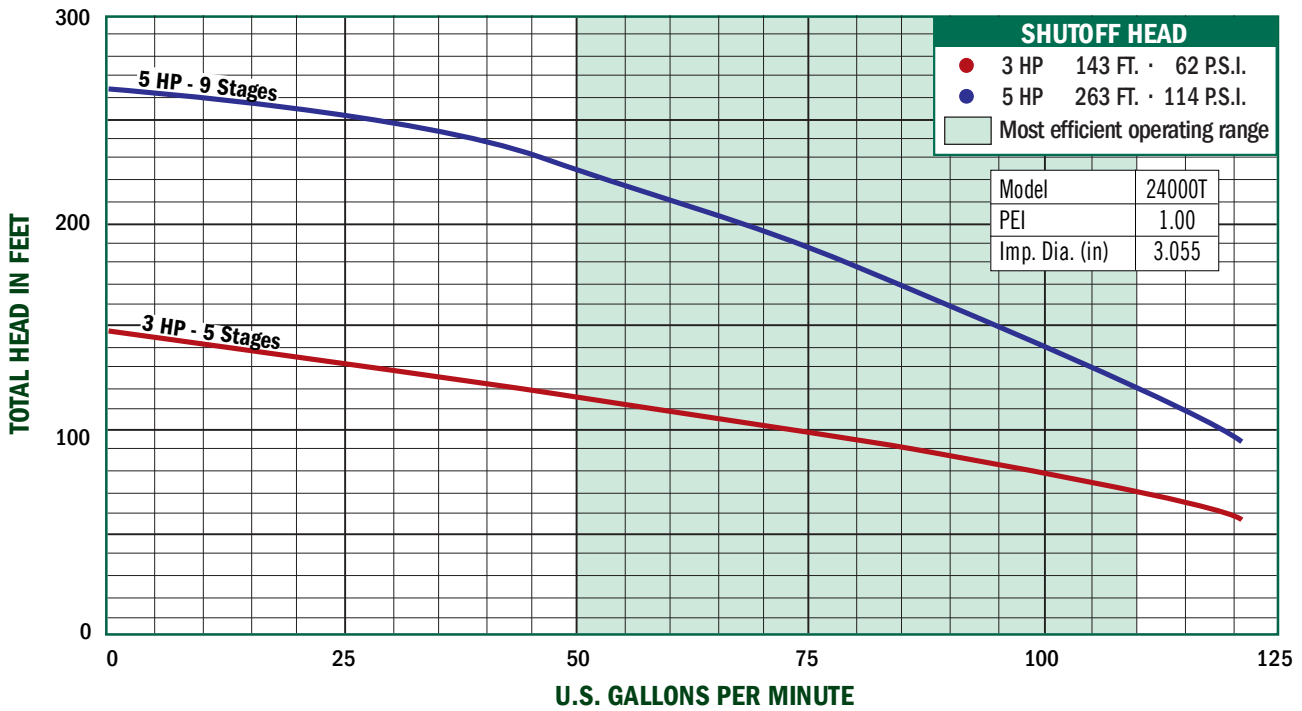

Stainless Steel - 24000 Series

Three Wire Three Phase, w/Transducer

Part No.	Model No.	HP	Stages	Volt	WT.
*6630-843	24300T3Z-APT	3 HP	5	230V	64
*6630-848	24500T3Z-APT	5 HP	9	230V	80

*3 HP and 5 HP AutoPAC's will be sold as sales kits (shipped in three boxes)