

Model 519

Condensate Pump

This fully automatic, easily installed, condensate pump removes condensation from air conditioning equipment, condensing furnaces, dehumidifiers, ice makers, water coolers and refrigeration systems.




- Handles condensate up to 140 °F (60 °C)
- 20 ft (6.1 m) TDH
- Wall mounts
- Four inlet options
- 3/8" Discharge
- Stainless steel shaft
- Built-in safety switch and check valve
- 6 ft power cord with ground
- Thermally protected
- Option available to include 20' of 3/8" clear tubing

TOTAL DYNAMIC HEAD FLOW PER HOUR

| MODEL | | 519 | |
|----------------|--------|--------------|--------|
| Feet | Meters | Gal. | Liters |
| 3 | .9 | 110 | 416 |
| 6 | 1.8 | 93 | 352 |
| 9 | 2.7 | 77 | 291 |
| 12 | 3.7 | 59 | 223 |
| 15 | 4.6 | 38 | 144 |
| 18 | 5.5 | 16 | 61 |
| Shut-off Head: | | 20 ft.(6.1m) | |

100% factory tested

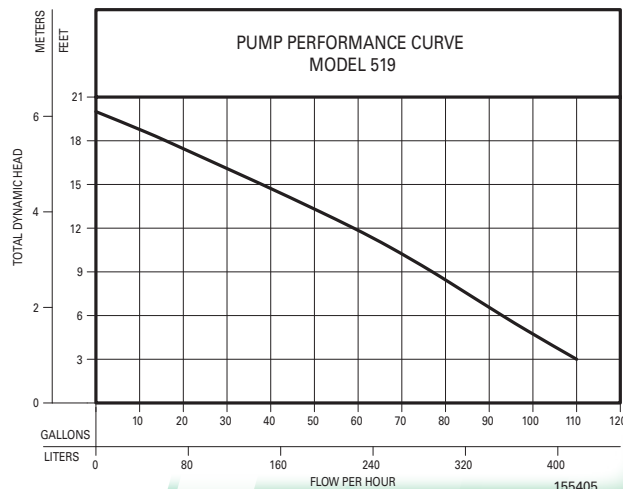

Trusted. Tested. Tough.®

zoellerpumps.com 800-928-7867
3649 Cane Run Road, Louisville, KY 40211 USA

FM3094
0720
Supersedes
0420